



6" SLOPE CEILING LED - 1400 LUMENS IC NEW CONSTRUCTION HOUSING

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

STANDARD SLOPE:

2/12 TO 6/12 PITCH (9° TO 27°)



**IC926LED (G4 14LM)
OPEN TRIMS**

PRODUCT DESCRIPTION

Dedicated LED, Air-Loc® sealed slope ceiling new construction housing with integral light engine • IC rated construction housing can be completely covered with insulation • Fully sealed housing stops infiltration and exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets • LED housing is designed to provide 50,000 hours of life and is compatible with standard Juno trims • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury
- Comparable light output to 32W compact fluorescent

PRODUCT SPECIFICATIONS

LED Light Engine Extruded heat sink and cast aluminum slider plate integrated directly with housing provides superior thermal management to ensure the long life of the LED • Replaceable light engine mounts directly to slider plate and incorporates the latest generation, high lumen output LED array • LEDs are binned within a 3-step MacAdam Ellipse exceeding ENERGY STAR® requirements for superior fixture to fixture color uniformity

- 2700K, 3000K, 3500K, or 4000K color temperatures available
- 90 CRI minimum.

Optical System Computer-optimized internal reflector with specular finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance

- Adjustable slider plate to position LEDs/reflector perpendicular to floor
- Plate includes 1/4" adjustment indicators for consistent alignment.

Aesthetic Trim Selections Compatible with a selection of existing Juno trims • Shadow free, knife edge design blends seamlessly into ceiling.

LED Driver Choice of dedicated 120 volt (120) driver or universal voltage (MVOLT) driver that accommodates input voltages from 120-277 volts AC at 50-60Hz • Power factor > 0.9 at 120V input • 120 volt only driver dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • Universal voltage driver is dimmable with the use of most 0-10V wall dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#) • Mounted inside housing on a removable J-box cover for ease of maintenance.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels ENERGY STAR® Certified when used with select baffle and cone trims • Certified to high efficacy requirements of California T24 JA8-2016 with select trims • UL listed for U.S. and Canada, through-branch wiring and damp locations • Union made

- UL and cUL listed.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.


HOUSING FEATURES

Housing Designed for use in IC (insulated ceiling) or non-IC construction • .032" aluminum housing sealed for Air-Loc compliance • Access door for junction box accessibility

- Inner skirt is vertically adjustable to accommodate up to a 1" ceiling thickness.



DIMENSIONS

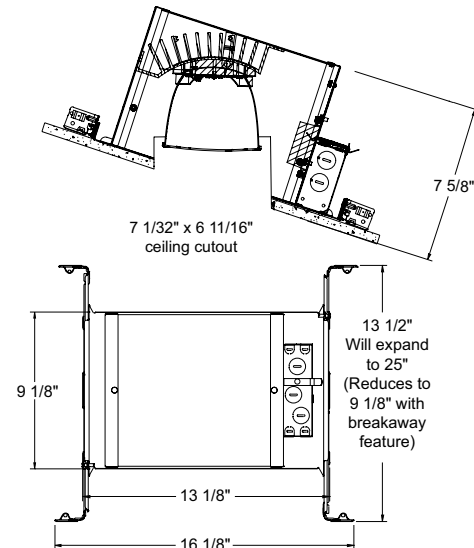

Junction Box Pre-wired junction box provided with (6) 1/2" and (1) 3/4" knockouts, (4) non-metallic sheathed cable connectors and ground wire, UL and cUL listed for through-branch wiring, maximum 8 #12 branch circuit conductors • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Push-in electrical connectors supplied as standard for fast, secure installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Real Nail® 3 Bar Hangers Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings

- Includes removable nail for repositioning of fixture in wood joist construction
- Integral T-bar mounting feature for suspended ceilings.

6" SLOPE CEILING LED - 1400 LUMENS IC NEW CONSTRUCTION HOUSING

STANDARD SLOPE: 2/12 TO 6/12 PITCH (9° TO 27°)

IC926LED (G4 14LM) OPEN TRIMS

ELECTRICAL DATA DEDICATED 120 VOLT ONLY DRIVER OPTION

120V	
Input Power	20.3W (+/-5%)
Input Current - Max	0.17A
Frequency	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (residential)
Minimum starting temp	-25°C

ELECTRICAL DATA UNIVERSAL VOLTAGE

	120V	277V
Input Power	20.3W (+/-5%)	20.8W (+/-5%)
Input Current - Max	0.17A	0.08A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class A (commercial)	FCC Title 47 CFR, Part 15, Class A (commercial)
Minimum starting temp	-40°C	-40°C

ORDERING INFORMATION

Housing and trim can be ordered together or separate, but will always ship separately.

Example: IC926LED G4 14LM 27K 90CRI 120 FRPC

Series	Generation	Lumens	Color Temperature	CRI	Voltage	Driver
IC926LED 6" LED Slope Ceiling New Construction IC Hsg	G4 Generation 4	09LM 900 Nominal Lumens	27K 2700K	90CRI 90+ CRI	120 120V	FRPC Forward/Reverse Phase Cut
		14LM 1400 Nominal Lumens	30K 3000K		MVOLT Multi-Volt (120-277V)	ZT 0-10V Dimming Driver
			35K 3500K			
			40K 4000K			

Note: 120V must be ordered with FRPC.
MVOLT must be ordered with ZT

Trim/Description



- 614 BABZ¹ 6" Standard Slope Downlight Baffle Trim - Black Baffle, Classic Aged Bronze Trim Ring
- 614 BBL¹ 6" Standard Slope Downlight Baffle Trim - Black Baffle, Black Trim Ring
- 614 BSC¹ 6" Standard Slope Downlight Baffle Trim - Black Baffle, Satin Chrome Trim Ring
- 614 BWH¹ 6" Standard Slope Downlight Baffle Trim - Black Baffle, White Trim Ring
- 614 WWH 6" Standard Slope Downlight Baffle Trim - White Baffle, White Trim Ring



- 620 BWH¹ 6" Standard Slope Downlight Cone Trim - Black Cone, White Trim Ring
- 620 CWH 6" Standard Slope Downlight Cone Trim - Clear Alzak Cone, White Trim Ring
- 620 GWH 6" Standard Slope Downlight Cone Trim - Gold Cone, White Trim Ring
- 620 HZSC 6" Standard Slope Downlight Cone Trim - Haze Cone, Satin Chrome Trim Ring
- 620 HZWH 6" Standard Slope Downlight Cone Trim - Haze Cone, White Trim Ring
- 620 WHZABZ 6" Standard Slope Downlight Cone Trim - Wheat Haze Cone, Classic Aged Bronze Trim Ring
- 620 WHZWH 6" Standard Slope Downlight Cone Trim - Wheat Haze Cone, White Trim Ring
- 620 WWH 6" Standard Slope Downlight Cone Trim - White Cone, White Trim Ring

Trim Size: 614 and 620-7 3/8" x 7 3/4" O.D.


Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

ENERGY STAR® Certified and T24 certified @ 30K, 35K and 40K only.

PHOTOMETRIC REPORT

Test Report #: PT10141606R
Catalog No: IC926LED G4 14LM 35K 90CRI
120 with 614 WWH Trim
Luminaire Spacing Criterion: 1.36
Luminaire LPW: 77



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1874
5	2145
10	2331
15	2369
20	2280
25	2113
30	1883
35	1580
40	1111
45	571
50	274
55	141
60	80
65	49
70	30
75	15
80	10
85	3
90	0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60' x 60' room)
Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	107	92	79
5.0'	69	59	50
6.0'	48	41	35
7.0'	39	33	28
8.0'	30	26	22
9.0'	23	20	17
10.0'	17	15	13

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	1010	N/A	64.8
0-40°	1320	N/A	84.7
0-60°	1507	N/A	96.8
0-90°	1558	N/A	100.0

INITIAL FOOTCANDLES (One Unit, 20.3W, 48.5° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	148.1	3.6'
6	65.8	5.4'
8	37.0	7.2'
10	23.7	9.0'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	47986
55	14655
65	6903
75	3367
85	2269