



# TRAC-MASTER®

Wall Wash/Floods

## 70W LED WALL WASH/FLOOD

**T257L**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

### PRODUCT SPECIFICATIONS

The 70W T257L wall wash/flood trac fixture delivers a powerful and uniform punch of light, utilizing less energy than a similar CMH fixture and offering up to 4 times the rated life. Its sleek, shallow profile enables it to virtually blend in with the trac. Operating at only 70W, it is able to deliver up to 4467 lumens, yielding an efficacy of up to 64 lumens per watt. Its unique thermal management design yields a maintenance-free 50,000 hours service life at 70% lumen maintenance. Available in 2700K, 3000K, 3500K and 4000K color temperatures, the white-light T257L wall wash/flood fixture is compatible with all Juno line voltage trac.

**Housing** Robust extruded aluminum channel with die cast aluminum end caps • Custom designed concealed heat sink provides outstanding thermal management, yielding 70% average lumen maintenance at 50,000 hours of operation • Rich, textured paint available in white, black and silver painted finishes.

**LED** Nichia LEDs provide outstanding reliability, performance and color quality/consistency • White phosphor high brightness LEDs in 2700K, 3000K, 3500K or 4000K color temperatures • High CRI of 80 minimum.

**Driver** Concealed in rear housing to minimize overall fixture footprint • Solid state electronic, Class 2 compliant • Integral overcurrent and short circuit protection • FCC Part 15 Class B rated.

**Dimming** Standard version is not dimmable • Optional dimming version available • May be dimmed with a wide variety of reverse phase ELV dimmers – see [T257L-DIM](#) for a list of approved dimmers or to confirm compatibility with desired dimmer.

**Lens** Shields LEDs and optical components from dust and other contaminants • Matte inner surface creates a diffuse, uniform beam pattern.

**Aiming** 90° vertical aiming capability.

**Power Connection** Attaches to trac via two standard trac adapters, one of which contains electrical contacts.

**Juno Universal Trac Adapter** Compatible with Juno Trac-Master 1 or 2-circuit systems or Juno Trac-Lites system • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • On /off switch included • Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac • Two-position power contact provided for two circuit application.

**Alternate TEK/HTEK Trac Adapter** Compatible with either Juno TEK or HTEK trac systems • System specific and assembled to trac fixture • Integrally polarized construction to prevent reverse installation – only allows insertion in proper orientation • Rotary circuit selector enables simple switching between circuits • Integral on/off switch enables individual fixtures to be switched for servicing.


**Labels** UL and C-UL Listed.

**Warranty** 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

Specifications subject to change without notice.



### DIMENSIONS

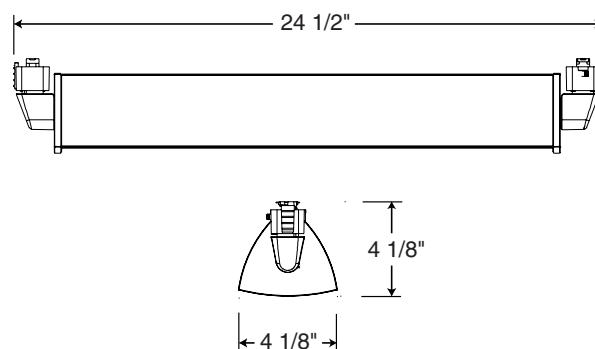

### ORDERING INFORMATION

Ordering Examples: T257L 30K 80CRI PDIM WH, T257L TEK 30K 80CRI PDIM BL

Series	Mounting Adapter Style	Color Temperature	Color Rendering Index	Dimming Compatibility	Finish
<b>T257L</b> 70W Wall Wash/ Flood LED	<b>Blank</b> Universal Trac Adapter <b>TEK</b> TEK 120V Trac Adapter <b>HTEK</b> HTEK 277V Trac Adapter	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>80CRI</b> 80 CRI	<b>OFF</b> On/Off (Non-Dimming) <b>PDIM</b> Phase Dimmable	<b>BL</b> Black <b>SL</b> Silver <b>WH</b> White



**TRAC-MASTER®**

Wall Wash/Floods

**70W LED WALL WASH/FLOOD****T257L****PERFORMANCE DATA<sup>1</sup>**

Catalog Number	Input Voltage	Watts (Typical)	Lumens	Efficacy (LPW)	Rated Life (Hours)
<b>T257L 27K</b>	120V	70W	4045	58	50,000
<b>T257L 30K</b>	120V	70W	4214	60	50,000
<b>T257L 35K</b>	120V	70W	4383	63	50,000
<b>T257L 40K</b>	120V	70W	4467	64	50,000

<sup>1</sup>Performance data is based on measurements of an individual fixture operating in a 25°C ambient.

**ELECTRICAL DATA**

Input Voltage	120V
Input Current (max.)	0.64A
Power Factor	>0.92
T.H.D.	<20%

**T257L WALL WASH/FLOOD****TRAC 3' FROM WALL**

Distance from ceiling	Single Fixture Performance						Multiple Fixture Performance								
	0	1'	2'	3'	4'	5'	← 4' →	← 5' →	← 6' →	← 7' →	← 8' →	← 9' →	← 10' →	← 11' →	← 12' →
TRAC 3' FROM WALL	□						□	□	□	□	□	□	□	□	□
1'	72	67	47	29	15	7	103	100	103	86	79	86	79	60	79
2'	147	128	84	46	23	11	193	180	193	169	134	169	158	94	158
3'	131	116	81	48	26	14	185	177	185	159	133	159	146	99	146
4'	82	75	58	39	24	14	132	131	132	111	104	111	98	82	98
5'	46	44	36	27	18	12	86	87	86	71	71	71	62	58	62
6'	26	25	22	18	13	9	56	57	56	47	47	47	40	39	40
7'	15	15	13	11	9	7	36	38	36	31	31	31	27	27	27
8'	9	9	8	7	6	5	24	25	24	21	22	21	18	19	18
9'	6	6	5	5	4	4	17	17	17	15	15	15	13	13	13

**TRAC 4' FROM WALL**

Distance from ceiling	Single Fixture Performance						Multiple Fixture Performance								
	0	1'	2'	3'	4'	5'	← 4' →	← 5' →	← 6' →	← 7' →	← 8' →	← 9' →	← 10' →	← 11' →	← 12' →
TRAC 4' FROM WALL	□						□	□	□	□	□	□	□	□	□
1'	29	27	24	19	14	8	58	58	58	46	44	46	39	40	39
2'	64	61	48	34	22	13	111	111	111	91	89	91	79	72	79
3'	85	79	62	43	27	16	142	143	142	119	114	119	105	91	105
4'	74	69	56	41	27	17	132	133	132	110	107	110	96	87	96
5'	52	50	42	33	24	16	105	106	105	87	87	87	75	72	75
6'	35	33	29	24	18	13	76	78	76	63	64	63	55	54	55
7'	23	22	20	17	14	10	54	55	54	46	47	46	39	40	39
8'	15	14	13	12	10	8	38	39	38	33	34	33	29	29	29
9'	10	10	9	8	7	6	27	28	27	24	25	24	21	21	21

For 2700K multiply by 0.96; for 3500K multiply by 1.04; for 4000K multiply by 1.06