


## EZ FLOOD

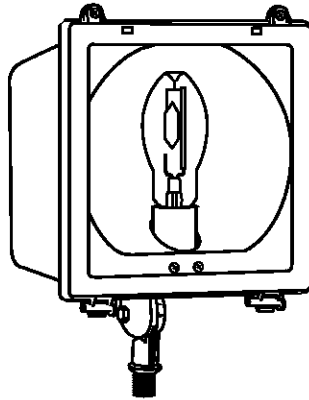

## INSTALLATION INSTRUCTIONS

### IMPORTANT

**READ CAREFULLY BEFORE INSTALLING FIXTURE.  
RETAIN INSTRUCTIONS FOR FUTURE REFERENCE.**

RAB's EZ Flood must be wired in accordance with the National Electrical Code and applicable local codes. Proper grounding is required for safety.

The EZ Flood is for outdoor use and should not be used in areas with limited ventilation or high ambient temperatures. Installation should be done by a qualified electrician.

**WARNING:** Make certain power is OFF before installing or maintaining fixture.

### LOCATION

Fixture should be located at least 18" below any overhang or other structural detail.

Fixture should not be recessed.

### MOUNTING


The EZ Flood can be mounted to any metal 1/2" NPS mounting hole. Fixture must be mounted vertically. Lamp and socket assembly may be positioned horizontally or vertically.

1. Route fixture leads through the mounting hole.
2. Twist EZ Flood foot into hole.

**CAUTION:** To avoid a possible shock hazard, do not connect wires until fixture is twisted into mounting hole.

### WIRING

1. Connect the "hot" fixture lead to the supply lead.
2. Connect the "common" fixture lead to "common" supply lead.
3. Fixture ground wire must be connected to supply ground.
4. Make sure connections are secure using wire nuts, crimp-on lugs or other approved connecting devices. All wiring connections in a junction box.

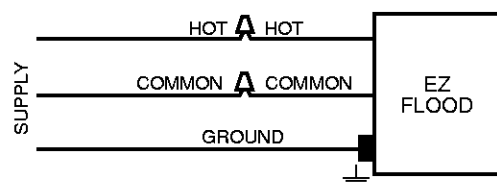

# INSTALLATION INSTRUCTIONS

(continued)

## AIMING

---

1. Loosen swivel screw and locknut.
2. Aim as desired.
3. Retighten locking screw. Tighten locknut.

## RE-LAMPING

---

**Caution:** Prior to installing, check that the lamp is of proper type and wattage. Observe lamp manufacturer's recommendations on lamp operation, ballast type and burning positions.

1. Disconnect power.
2. Make sure fixture and lamp are cool enough to touch.
3. Loosen the two screws on top of the die-cast hinged door frame. Open frame.
4. Replace lamp.
5. Before closing hinged door frame, make sure frame gasket is properly seated all around fixture.
6. Close door. Tighten screws.

## CLEANING

---

**Caution:** Be sure power is off. Be sure fixture temperature is cool enough to touch.

Clean Reflector and lens with a cloth moistened with non abrasive non flammable glass cleaning solution.

## TROUBLESHOOTING CHECKLIST

---

**Check that:**

1. Proper lamp is installed. Lamp is not faulty.
2. Line voltage at the fixture is proper.
3. Fixture is wired properly.
4. Fixture is grounded properly.

## FACTORY INSTALLED OPTIONS

---

**Add suffix:**

/PC for photocell

### Easy Installation & Product Help

**Fax Back**  
Faxed Tips & Specs,  
24 hours/day.  
888 RAB-1236

**www.rabweb.com**  
Visit our internet site for  
color product photos  
and installation tips.

**Tech Help Line**  
Call our friendly experts.  
8AM - 5PM ET Mon. - Fri.  
888 RAB-1000

**e-mail**  
Your questions and requests  
will be answered promptly.  
tech@rabweb.com



*THESE INSTRUCTIONS DO NOT COVER ALL DETAILS OR VARIATIONS IN EQUIPMENT, NOR DO THEY PROVIDE FOR EVERY POSSIBLE CONTINGENCY TO BE MET IN CONNECTION WITH INSTALLATION, OPERATION OR MAINTENANCE.*