



# FNS1000QT/PCS2



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

## DESCRIPTION

Floodinator with steel trunnion mount allows easy surface mounting for aiming flexibility. Factory wired with QT CWA-HPF ballast and 3-foot flexible cord. Adjustable aiming over 180° arc. Mounting can be locked securely in place. Lamp supplied.

## SPECIFICATIONS

### Effective Projected Area:

EPA = 4.2

### Finish:

Chip and fade resistant polyester powder coating.

### Housing:

One-piece die cast aluminum with die cast door frame held captive when opened

### Lens Gasket:

High temperature extruded silicone set in die cast retaining groove. Remains in place during relamping

### Lens:

Thermal, tempered shock resistant glass, 5/32" thick

### Reflector:

High quality anodized aluminum eliminates redirected energy to prolong lamp life. Contoured for maximum horizontal and vertical beam dispersion

### UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground

### Socket:

Porcelain socket pulse rate 4 KV, 1500 watts and 600 volts, reinforced with cat's eyes for added durability. Silicone and fiberglass #14 gauge socket leads rated for 200°C. Plated screw shell designed to resist corrosion with spring loaded center contact.

### EPA:

4.2

### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

### Photocontrol:

Swivel Photocontrol 277 volt

### Quad Tap:

Fixture works with 120, 208, 240, and 277 volts


### Color:

Bronze

### Weight:

73.75

## DIMENSIONS

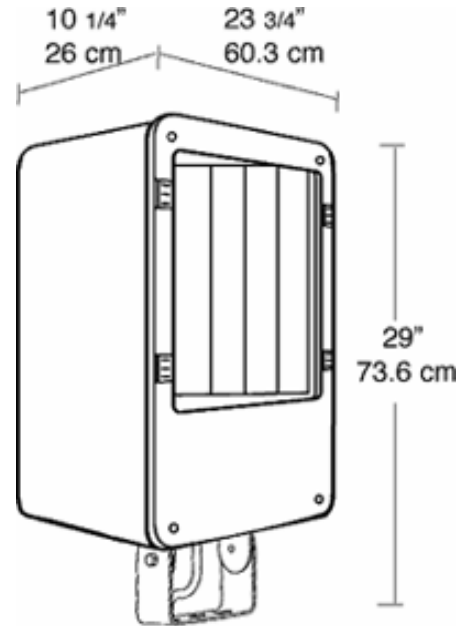

## ORDERING INFORMATION

**High Pressure Sodium**  
 Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
1000	BT37	Mogul	CWA-HPF QT	6.4/9.5	3.8/5.5	3.2/4.8	2.8/4.2	1100	S52	125000	24000

**Factory Installed Options**  
 Add suffix to Catalog Number

Swivel Photocontrol wired for 480 Volt (/PCS4) Single fusing for 120 and 277 volt (/F)  
 Swivel Photocontrol wired for 208 - 240 Volt (/PCS5) Double fusing for 208 and 240 volt. (/FF)  
 Swivel Photocontrol wired for 120V (/PCS) Button Photocontrol wired for 120V (/PC)  
 480 Volt (/480)

Note: Specifications may change without notice