# RB6T8HBF

RAB offers energy efficient fluorescent fixtures for large space lighting including warehouses, factories, and distribution centers. The RBAY delivers the high quality needed for these applications with strong, heavy duty 22 gauge rigid housing with no sharp edges. The superior strong-box protective foam case packaging protects the RBAY so it arrives in perfect shape and ready to install.

Lamp Info		Ballast Info	
Туре:	Т8	Туре:	Instant Start
Watts:	192W	120V:	1.60A
Shape/Size:	N/A	208V:	0.92A
Base:	N/A	240V:	0.80A
ANSI:	N/A	277V:	0.69A
Hours:	24,000	Input Watts:	173W
Lamp Lumens:	10784	Efficiency:	111%
Efficacy:	62 LPW		

# **Technical Specifications**

# UL Listing:

Dry Locations Only. Ceiling Mount Only.

### Housing:

22 gauge die formed with white powder coat finish. Y Hooks included for easy chain or cable mounting.

# Reflector:

Alanod 320G-E with reflectivity of ≥86%.

### Lamps (Not supplied):

6 X 32 Watt T8 double-ended linear fluorescent lamps.

### Ballast:

Electronic Instant Start, HPF. Quick Disconnects for safety.

**Ballast Minimum Starting Temperature:** -20°F.

Total Watts: 6x32W.

**Input Volts:** 120-277V.


**Operating Amps:** 1.86/.8.

Ballast Factor: 1.18.

**Base:** Medium Bi Pin.

Mounts: Surface or Chain (Y Hooks included).



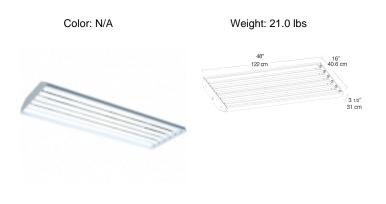

#### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.