# FSLEDH3N/120/TL





FSLED Steplights 3W. Suitable for both indoor and outdoor use. Easy installation into a recessed 2" x 4" jbox. Available in vertical or horizontal models either with trims or trimless.

Color: Bronze

Weight: 0.6 lbs

# **Technical Specifications**

## Listings

**UL Listing:** 

Suitable for wet locations

#### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

Construction

# IP Rating:

Ingress Protection rating of IP66 for dust and water.

Housing:

Precision die cast aluminum.

# Ambient Temperature:

Suitable for use in 40°C (104°F) ambient temperatures

## Cold Weather Starting:

The minimum starting temperature is -40°C/-40°F

#### Lens:

Tempered glass lens.

#### Gaskets:

High temperature silicone.

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

# Electrical

THD:

31.5% at 120V

# Power Factor:

93.8% at 120V

### LED Characteristics

### LEDs:

Long-life, high-efficiency surface mount LEDs

### **Color Stability:**

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period.

## **Color Uniformity:**

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2015.

Project: Prepared By:		Type: Date:	
Type:	Constant Current	Watts:	3W
120V:	0.108A	Color Temp:	4000K
208V:	N/A	Color Accuracy:	83 CRI
240V:	N/A	L70 Lifespan:	100000
277V:	N/A	Lumens:	39
Input Watts:	3W	Efficacy:	13 LPW
Efficiency:	99%		

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### Green Technology:

Mercury and UV free, and RoHS compliant.

# Other Trim:

1/2" Trim

#### Mountina:


Recessed junction box. Horizontal models.

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

# FSLEDH3N/120/TL



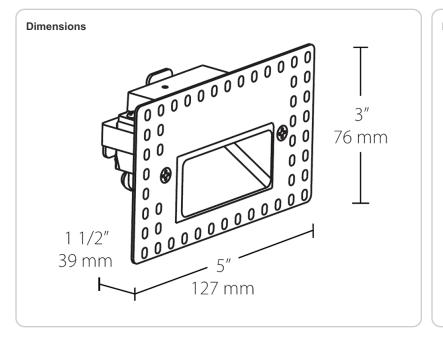

# Features

Easy installation into a recessed 2" x 4" job

Deep regress of light source eliminates glare

Concealed hardware for a clean, sophisticated look

Suitable for both indoor and outdoor use

5 year warranty