



Light your path and enhance your outdoor space with durable die cast metal LED pathway lights that are built to withstand the elements. Available in full cutoff, 1 tier and 2 tier models, FERN is equivalent to 20W halogen and has a 100,000 hour LED lifespan.

Color: Bronze

Weight: 5.0 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type:	Constant Current	Watts:	6W
120V:	N/A	Color Temp:	2700K
208V:	N/A	Color Accuracy:	81 CRI
240V:	N/A	L70 Lifespan:	100000
277V:	N/A	Lumens:	292
Input Watts:	6W	Efficacy:	50 LPW
Efficiency:	N/A		

**Technical Specifications**

**Listings**

**UL Listing:**

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

**Construction**

**IP Rating:**

Ingress Protection rating of IP66 for dust and water

**Cold Weather Starting:**

The minimum starting temperature is -34° F/-30° C.

**Housing:**

Precision die-cast aluminum housing.

**Lens:**

Clear polycarbonate

**Mounting:**

18" stem with 1/2" thread on both ends. Mounts to sturdy plastic pike to ground mount (included).

**Green Technology:**

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

**Gaskets:**

High-temperature silicone gaskets.

**Finish:**

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

**Electrical**

**System Transformer:**

No driver needed. System transformer with 60 Hz only. 054A.

**LED Characteristics**

**Lifespan:**

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

**LEDs:**

Long-life, high-efficiency surface mount LEDs

**Color Stability:**

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period

**Color Uniformity:**


RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2015.

**Other**

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

## Dimensions

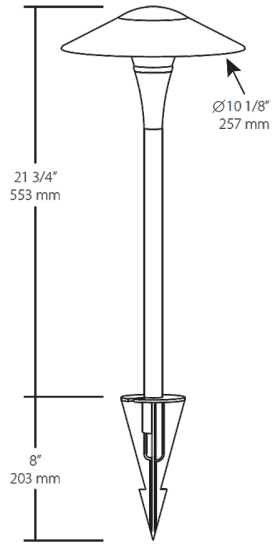

## Features

- Compatible with 12VAC systems
- Includes 8" ground spike
- Equivalent to 20W halogen landscape lights
- 100,000-Hour lifespan

## Ordering Matrix

Family	Tiers	LED	Wattage	Color Temp	Finish
LL	1	LED	6LV	YY	A
	<b>FC</b> = Full Cutoff 1 = 1 Tier 2 = 2 Tiers	<b>LED</b> = LED	<b>6LV</b> = 6W 12VAC	<b>YY</b> = 2700K (Residential Warm)	<b>A</b> = Bronze <b>B</b> = Black <b>D</b> = Sand <b>W</b> = White <b>VG</b> = Verde Green