## AJSH150QTW/PCS



mounting at 90° to pole. Drilling 2" on center. Factory wired for 277V. Lamp supplied. Weight: 20.4 lbs

Color: White

## **Technical Specifications**

#### Electrical

#### Photocell:

120V Swivel Photocell Included. Photocell is only compatible with 120V.

#### Socket:

HID Porcelain 4KV Pulse rated Medium base. Corrosion resistant screw shell with spring loaded center contact.

## Listings

**UL Listing:** 

Suitable for wet locations

## Construction

#### **Construction:**

Die cast aluminum housing and door. Tether connects door to housing for safety.

#### **Reflector:**

High quality hydroformed semi-specular aluminum.

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

#### **Effective Projected Area:**

EPA = 0.8 With House Side Shield = 1.5

## Other

#### Patents:

The design of the AJ Area Light is protected by U.S. Patents D579,140, D579,141, D591,445, Canada patents D127,031, D127,040, D127,045, China patents ZL200830143714.3, ZL200830143713.9, ZL200830143712.4, Mexico patents 27395, 28572, 28577 and Taiwan patents D129,808 and D131,622

#### **Country of Origin:**

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

#### **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

Project:		Туре:	
Prepared By:		Date:	
Lamp Info		Ballast Info	
Туре:	ED17	Туре:	HX-HPF QT
Watts:	150W	120V:	1.6/1.6A
Shape/Size:	N/A	208V:	N/A
Base:	N/A	240V:	N/A
ANSI:	N/A	277V:	N/A
Hours:	24,000	Input Watts:	188W
Lamp Lumens:	16,000	Efficiency:	80%
Efficacy:	85 LPW		

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

#### **Trade Agreements Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.


#### **GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.



# AJSH150QTW/PCS



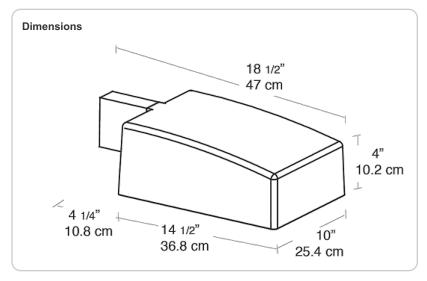

#### Features

For use at 10' - 15' mounting height

Sleek design for low EPA

Heavy duty die cast aluminum housing and door

4kv pulse rated socket

Hydroformed reflector

- Silicone gasket seals optical compartment
- Lamp supplied