

CLED2X10W

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

20 Watts of energy efficient ceiling mounted LED lighting. LED Light Engine lasts 50,000 hours. 5 year warranty. Flush mount fixture bracket. LED Light Engine included.

SPECIFICATIONS

Color Uniformity:

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

Chip and fade resistant polyester powder coat finish

Green Technology:

RAB LEDs are Mercury and UV free

Heatsink:

Cast aluminum thermal management system for optimal heat sinking. Designed for cool operation, most efficient output and maximum LED life by minimizing LED junction temperature

Housing:

Precision die cast aluminum housing and lens framing

LED Light Engine:

Multi-chip 10W high output long life LED Driver: Constant Current, Class II, 120V-240V, 50/60 Hz, 350mA

Lumen Maintenance:

The LED will deliver 70% of its initial lumens at 50,000 hours of operation

Patents:

The design of the CLED is protected by U.S. Patent D608,040, D615,689 and patents pending in Canada, China, Taiwan and Mexico

UL Listing:

Damp Locations

Warranty:

RAB LED fixtures give you peace of mind because both the fixture and light engine components are backed by RAB's 5 Year Warranty. For more information,

Ambient Temperature:

Suitable for use in 40C (104F) ambient temperatures

California Title 24:

LPACK complies with California Title 24 building and electrical codes.

Cold Weather Starting:

The minimum starting temperature is -40°C

Color Accuracy:

92 CRI

Fixture Efficacy:

42 Lumens per Watt

IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80

Light Color:

5250 K (Daylight)


Color:

White

Weight:

6.6

DIMENSIONS

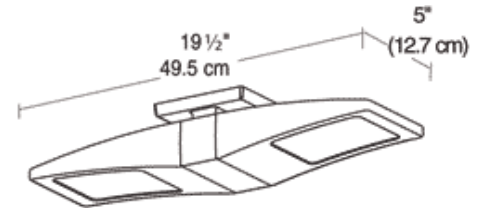

ORDERING INFORMATION

LED Lamp supplied with fixture	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
	20	L.E.D.	Therm al Heatsi nk	Constant Current	.86 A/.86 A	.86 A/.86 A	.86 A/.86 A	N/A	26	N/A	1094	50000

Factory Installed Options
Add suffix to Catalog Number

Note: Specifications may change without notice