

## product

Versatile Floodlight with hinged lens frame and Hydroformed reflector. Field adjustable vertical and horizontal lamp positions.

Color: White

Weight: 7.6 lbs

Project:

Type:

Prepared By:

Date:

## Lamp Info

Type: Triple 26W  
Watts: 26W  
Shape/Size: N/A  
Base: N/A  
ANSI: N/A  
Hours: 12,000  
Lamp Lumens: 1,800  
Efficacy: 62 LPW

## Ballast Info

Type: Electronic QT  
120V: 0.25A  
208V: N/A  
240V: N/A  
277V: N/A  
Input Watts: 29W  
Efficiency: 90%

## Technical Specifications

## Listings

## UL Listing:

Suitable for wet locations. Suitable for ground mounting.

## Electrical

## Photocell:

Button Photocell 120V included. Photocell is only compatible with 120V.

## Socket:

Porcelain 4kv Pulse Rated socket with nickel plated screw shell.

## Construction

## Housing:

Precision die cast aluminum. 1/2" NPS threaded arm with locking swivel.

## Reflector:

Hydroformed aluminum. Field adjustable vertical or horizontal.

## Lens Gasket:

High temperature tubular silicone set in die cast retaining groove remains in place during relamping.

## Lens Frame:

Precision die cast aluminum. Hinged for easy access.

## Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

## Ground Mounting:

Use the new MPM19 PVC Mighty Post with aluminum cap for sturdy installation.

## EPA:

0.6

## Other

## Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

## Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

## Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


## Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

## GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

## Dimensions

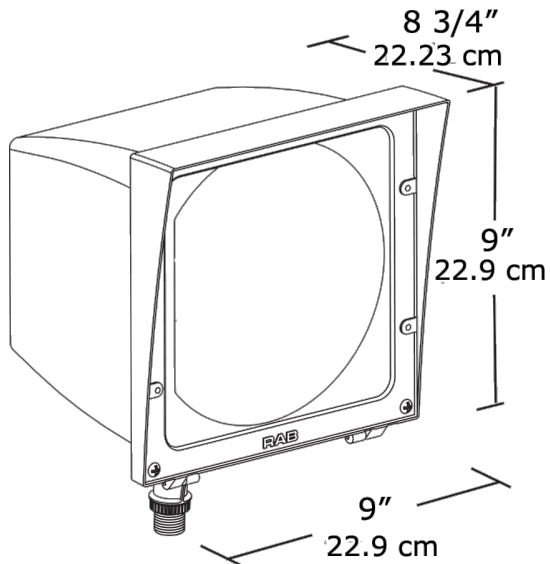

## Features

Fins for heat dissipation extend lamp & ballast tube

Hinged lens frame is captive during relamping

Silicone gasket for durable weatherproofing

Hydroformed reflector is field adjustable to vertical or horizontal lamp positions

Long life lamp included

Precision die cast aluminum housing and lens frame with durable polyester powder coating

EZ Grip locknut matches fixture finish and can be adjusted with fingers, pliers or a screwdriver