EZF32QT



product

Versatile Floodlight with hinged lens frame and Hydroformed reflector. Field adjustable vertical and horizontal lamp positions.

Color: Bronze Weight: 7.6 lbs

Project:	Туре:
Prepared By:	Date:

Type: Triple 32W Type: Electronic QT Watts: 32W 120V: 0.3A Shape/Size: N/A 208V: 0.21A Base: N/A 240V: 0.16A ANSI: N/A 277V: 0.13A	Lamp Info		Ballast Info	
Hours: 12,000 Input Watts: 36W Lamp Lumens: 2,400 Efficiency: 89% Efficacy: 67 LPW	Type: Watts: Shape/Size: Base: ANSI: Hours: Lamp Lumens:	32W N/A N/A N/A 12,000 2,400	120V: 208V: 240V: 277V: Input Watts:	0.3A 0.21A 0.16A 0.13A 36W

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

Construction

Housing:

Precision die cast aluminum. 1/2" NPS threaded arm with locking swivel.

Reflector:

Hydroformed aluminum. Field adjustable vertical or horizontal.

Lens Gasket:

High temperature tubular silicone set in die cast retaining groove remains in place during relamping.

Lens Frame:

Precision die cast aluminum. Hinged for easy access.

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

Ground Mounting:

Use the new MPM19 PVC Mighty Post with aluminum cap for sturdy installation.

EPA:

0.6

Electrical

Socket:

Porcelain 4kv Pulse Rated socket with nickel plated screw shell.

Other

Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act

Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.



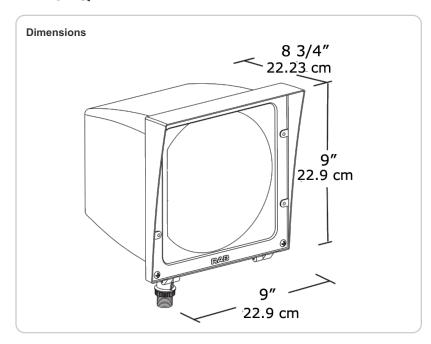

Features

Fins for heat dissipation extend lamp & ballast title

Hinged lens frame is captive during relamping

Silicone gasket for durable weatherproofing

Hydroformed reflector is field adjustable to vertical or horizontal lamp positions

Long life lamp included

Precision die cast aluminum housing and lens frame with durable polyester powder coating

EZ Grip locknut matches fixture finish and can be adjusted with fingers pliers or a screwdriver