EZF64QTW/PC



product

Versatile Floodlight with hinged lens frame and Hydroformed reflector. Field adjustable vertical and horizontal lamp positions.

Color: White

Weight: 7.6 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type:	Triple 64W	Type:	Electronic QT
Watts: Shape/Size:	64W N/A	120V: 208V:	0.6A N/A
Base:	N/A	240V:	N/A
ANSI: Hours:	N/A 12.000	277V: Input Watts:	N/A 72W
Lamp Lumens:	4,800	Efficiency:	89%
Efficacy:	67 LPW		
Ellicacy:	67 LPVV		

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

Electrical

Photocell:

Button Photocell 120V included. Photocell is only compatible with 120V.

Socket

Porcelain 4kv Pulse Rated socket with nickel plated screw shell.

Construction

Housing:

Precision die cast aluminum. 1/2" NPS threaded arm with locking swivel.

Reflector:

Hydroformed aluminum. Field adjustable vertical or horizontal.

Lens Gasket:

High temperature tubular silicone set in die cast retaining groove remains in place during relamping.

Lens Frame:

Precision die cast aluminum. Hinged for easy access.

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

Ground Mounting:

Use the new MPM19 PVC Mighty Post with aluminum cap for sturdy installation.

EPA:

0.6

Other

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

Trade Agreements Act Compliant:


This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

EZF64QTW/PC



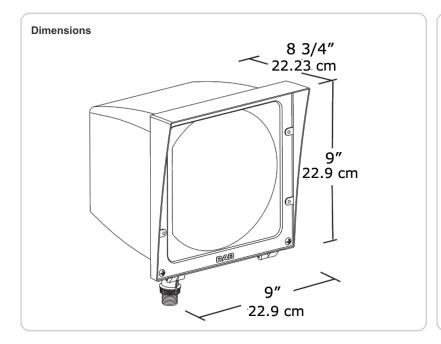

Features

Fins for heat dissipation extend lamp & ballast title

Hinged lens frame is captive during relamping

Silicone gasket for durable weatherproofing

Hydroformed reflector is field adjustable to vertical or horizontal lamp positions

Long life lamp included

Precision die cast aluminum housing and lens frame with durable polyester powder coating

EZ Grip locknut matches fixture finish and can be adjusted with fingers pliers or a screwdriver