

LANDSCAPE LAWN LIGHTS

Classic Landscape Lawn Lights
packed with rugged features.
Now with Energy Saving CFL
and Self-Ballasted Fluorescent



Rugged die cast aluminum housing
with durable powder coating.

Socket with all copper electrical parts and 20" leads

Quick and secure installation with one
corrosionproof screw


Threaded, gasketed globes for durable
weatherproofing and easy relamping

12" color matched mounting stem
with 1/2" threads available

Includes easy mounting 1/2" threaded nipple



ST12VG

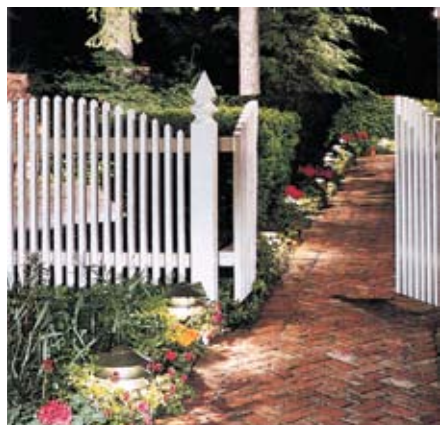

Rugged path lights with louvers to direct light
downward blend with any landscaping.



For sturdy Lawn Light mounting,
use RAB Mighty Posts[®]
(see pages 116-117)

Product Information

Incandescent (120 volt)

Lamp not supplied

Compact Fluorescent (120 volt)

Lamp supplied with fixture.
Minimum operating temperature 32°F
NPF 120 volt ballast

Self Ballasted Compact Fluorescent Lamps

Lamp supplied with fixtures
Minimum operating temperature -20°F

Lamp Watts	Lamp Type	Lamp Base	Initial Lumens	Lamp Hours
75	A-19	Med	1220	750
100	A-19	Med	1650	750
13	Quad	GX23-2	860	10,000
13	Spiral	Med	870	10,000
23	Spiral	Med	1450	10,000

Specifications

UL Listing:

Suitable for wet locations. Suitable for
mounting within 4 feet of the ground.

Socket:

Medium base porcelain with all copper
electrical parts and 20" leads, including
a ground lead.

Lamps:

Incandescent- (not supplied)
Medium base A-19 lamps, 120V.
4-tier - 100 watt max.
3-tier - 75 watt max.
Fluorescent- (supplied)
13 watt quad tube
NPF 120v ballast, GX23-2 base
13w self ballasted spiral lamp, Med. base
23w self ballasted spiral lamp, Med. base

Globes:

Threaded, gasketed globe protects against
weather, garden sprinklers and insects.
Clear glass GL100 globes standard for 4
Tier. Clear glass GL60 globes standard for
3 Tier.

Housing:

Die cast aluminum housing with powder
coat finish.

Voltage:

120 volts AC

Patents:

The designs of RAB fixtures are protected
under U.S. and international intellectual
property laws.

Replacement Parts:

Part	Catalog #
Socket	SLL
Globe for 4 tier -clear	GL100
Globe for 4 tier -white	GL100W
Globe for 3 tier - clear	GL60

Mounting Stem:

Part	Catalog #
12" Stem Verde Green	ST12VG
12" Stem Black	ST12B

Mighty Post Mounting:

See page 116.



Four Tier 6"

Rugged die cast aluminum 6" diameter housings. Threaded, gasketed clear glass globe for durable weatherproofing and easy relamping. 1" long, 1/2" threaded nipple included for easy mounting. 100 watt max. Incandescent lamp not supplied. Fluorescent lamp supplied.

Finish: ● Black
● Verde Green



Four Tier Flare

10" diameter top tier, 6" diameter lower tier. Rugged die cast aluminum housings. Threaded, gasketed clear glass globe for durable weatherproofing and easy relamping. 1" long, 1/2" threaded nipple included for easy mounting. 100 watt max. Incandescent lamp not supplied. Fluorescent lamp supplied.

Finish: ● Black
● Verde Green



Three Tier 6"

Rugged die cast aluminum 6" diameter housings. Threaded, gasketed clear glass globe for durable weatherproofing and easy relamping. 1" long, 1/2" threaded nipple included for easy mounting. 75 watt max. Incandescent lamp not supplied. Fluorescent lamp supplied.

Finish: ● Black
● Verde Green



Three Tier Flare

10" diameter top tier, 6" diameter lower tiers. Rugged die cast aluminum housings. Threaded, gasketed clear glass globe for durable weatherproofing and easy relamping. 1" long, 1/2" threaded nipple included for easy mounting. 75 watt max. Incandescent lamp not supplied. Fluorescent lamp supplied.

Finish: ● Black
● Verde Green



Catalog Numbers

Verde Green		Black	
LL22VG	LL22B	LL23VG	LL23B
LL22VG/F13	LL22B/F13	LL23VG/F13	LL23B/F13
LL23VG/FS23	LL23B/FS23	LL23VG/FS23	LL23B/FS23

Verde Green		Black	
LL322VG	LL322B	LL323VG	LL323B
LL322VG/F13	LL322B/F13	LL323VG/F13	LL323B/F13
LL322VG/FS13	LL322B/FS13	LL323VG/FS13	LL323B/FS13

Verde Green		Black	
LL322VG	LL322B	LL323VG	LL323B
LL322VG/F13	LL322B/F13	LL323VG/F13	LL323B/F13
LL322VG/FS13	LL322B/FS13	LL323VG/FS13	LL323B/FS13

Dimensions

