

RAB LIGHTING LFP38S



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Premium PAR38 Flood with large, molded high temperature black silicone gasket that totally seals lamp. Replaces RAB catalog #B. Die cast aluminum housing. EZ Grip locknut. Suitable for mounting within 4' of the ground. PAR38 or PAR20, 150 watt max. Lamp not supplied.

SPECIFICATIONS

Housings:

Precision die cast aluminum. Tuffy flood is molded plastic

Sockets:

Porcelain with all copper current carrying components and spring loaded center contact

Swivels:

Fully adjustable with sure-grip locks. 1/2" NPS threaded arm with locking swivel fits all standard mounting covers.

UL Listing:

Suitable for wet locations.

Lamp:

PAR38 or PAR20, 150 watt max. lamp not supplied

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws


Color:

Silver gray

Weight:

0.65

DIMENSIONS

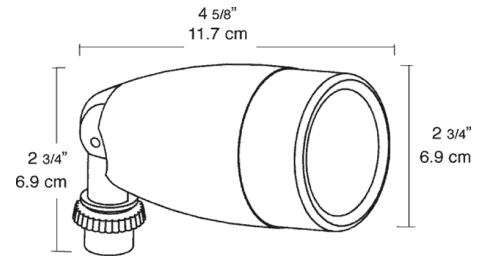

ORDERING INFORMATION

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
150	PAR20	Medium	0	0	0	0	0	0	0	550	2500

Factory Installed Options
 Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
 © 2009