



# PLF13



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

## DESCRIPTION

High quality polycarbonate PL floodlight. Supplied with one, two or three 13 watt twin tube compact fluorescent lamps. Adjustable swivel mounting arm with 1/2" thread. Lamps supplied.

## SPECIFICATIONS

### Housing and Lens:

Corrosionproof and vandal resistant polycarbonate

### Lens Gasket:

High temperature tubular silicone

### Reflector:

Anodized aluminum

### Sockets:

GX23 base

### UL Listing:

Suitable for wet locations. (PLF 13 &26) For side wall mounting only

### Ballast Minimum Starting Temperature:

23

### F13:

Compact Fluorescent 13W

### Lamp:

13 watt compact fluorescent lamps supplied with fixture

### Minimum Temperature:

0°F

### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.


### Color:

Bronze

### Weight:

1.9

## DIMENSIONS

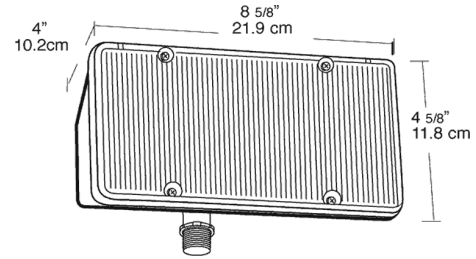

## ORDERING INFORMATION

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI Lumens	Initial Lamp Hours
				120V	208V	240V	277V			
13	13W Twin	GX23	NPF 120V					0	900	10000

### Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice

**RAB Lighting, Inc.** • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com

© 2009