



2' x 2' LED panel lights provide smooth and uniform light edge-to-edge for a clean, modern look. For use in drop ceilings or drywall using the optional recessed mounting kit. Includes built in support for Lightcloud, a wireless lighting control system and service, fully developed by RAB.

Color: White

Weight: 21.0 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Driver Info

Type: Constant Current  
120V: 0.29A  
208V: 0.167A  
240V: 0.145A  
277V: 0.126A  
Input Watts: 33W  
Efficiency: N/A

## LED Info

Watts: 34W  
Color Temp: 4000K  
Color Accuracy: 83 CRI  
L70 Lifespan: 100000  
Lumens: 4,285  
Efficacy: 129 LPW

## Technical Specifications

### Lightcloud

#### Lightcloud Installed:

Lightcloud is a commercial wireless lighting control system and service fully developed and supported by RAB. It's powerful and flexible, yet easy to use and install.

### Listings

#### UL Listed:

Suitable for damp locations. Recommended for indoor use only.

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.  
DLC Product Code: P0000171K

### Construction

#### IC Rating:

Suitable for insulated ceilings

#### Lens:

High-transmission acrylic lens with excellent distribution and uniformity.

#### Housing:

Lightweight housing is constructed of extruded aluminum.

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

#### Quick and Easy Installation:

Modular splice box/driver compartment available for quick installation. Integral Tee grid clips make installation easy and secure.

#### Green Technology:

Mercury and UV free, and RoHS compliant.

### LED Characteristics

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### LEDs:

Long-life, High efficiency, micro-power, surface mount LEDs; binned and mixed for uniform light output and color.

#### Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

### Electrical

#### Driver:

Constant Current, Class 2, 100-277V, 50/60Hz, 4kV Surge Protection, 700mA, 100-277V 0.4A, Power factor 99%.

### Other

#### California Title 24:

See PANEL2x2-34/D10 for a 2013 California Title 24 compliant product. Any additional component requirements will be listed in the Title 24 section under technical specifications on the product page.

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

#### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

#### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

#### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.


#### GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

PANEL2X2-34N/LC



Dimensions

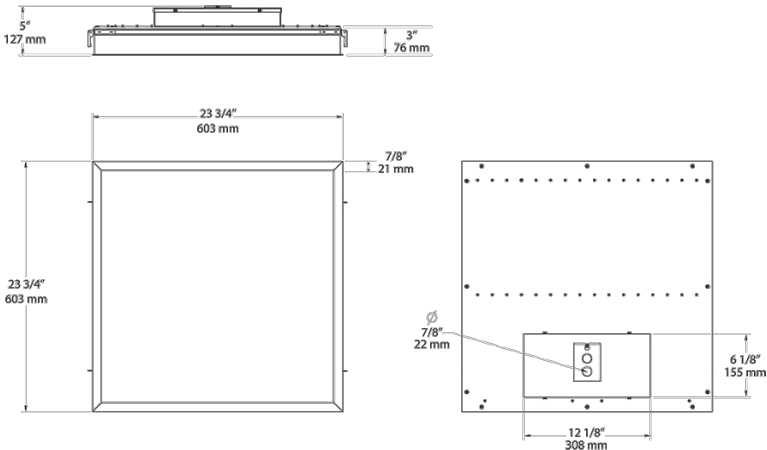

Features

- High-transmission acrylic lens provides excellent distribution and uniformity
- UL Listed for damp locations
- 5-year warranty
- Built in support Lightcloud™
- Easy setup - simply power on, confirm device connectivity and call 844-LIGHTCLOUD

Ordering Matrix

| Family | Size          | Watts                            | Color Temp   | Dimming                               | Lightcloud       |
|--------|---------------|----------------------------------|--|---------------------------------------|------------------|
| PANEL  | 2X2           | 34                               | N  |                                       | /LC              |
|        | 2X2 = 2' x 2' | 34 = 34W<br>41 = 41W<br>52 = 52W | Y = 3000K (Warm)<br>YN = 3500K (Warm Neutral)<br>N = 4000K (Neutral) | Blank = No Dimming<br>/D10 = Dimmable | /LC = Lightcloud |