



WPTF28MSW



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Tallpack in 28 & 42 watt compact fluorescent with built-in mini sensor for motion activated operation. Vandal resistant polycarbonate housing. Sensor has 180° detection and controls up to 250 watts @ 120v. Minimum starting temperature -20° F for 28w, 0° F for 42w. Lamp supplied.

SPECIFICATIONS

"No Hands" Auto Testing:

Auto mode starts after 4 minutes of testing.
 No adjustment needed.

Built for Severe Conditions:

Double weatherproofing for long life

LED Detection Indicator:

Glows red day and night for "on-guard" deterrence.

Manual Override:

Double flip wall switch logic prevents activation by short power outages. Resets after 8 hours. No extra wiring needed.

Photocontrol:

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications. Please specify voltage.

Quick Test Time:

5 seconds test time for fast installation.
 Works day or night.

Sensor Case Construction:

Precision molded Lexan®

Surge Protection:

Withstands up to 3000 volts

Time Adjustment:

5 seconds to 15 minutes CFL lamps have longer life if Time Adjustment is set to < 7 minutes.

UL Listing:

Suitable for wet locations.

Vandal Resistant Lens:

Hard lens resists vandalism

Voltage:

120 volts AC 60 Hz.

Ballast Minimum Starting Temperature:

14

Detection:

180° detection

Housing:

Vandal resistant polycarbonate housing

Min Start Temp:

-20°

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

Refractor:

Prismatic polycarbonate refractor for wide light distribution

Switching Capacity:

Controls up to 250 watts Fluorescent @ 120 volts


Color:

White


Weight:

5

DIMENSIONS

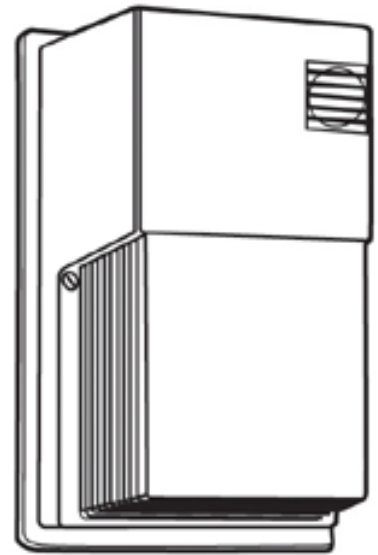

DETECTION PATTERN

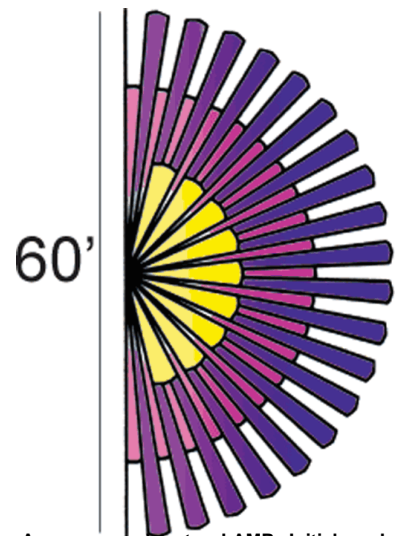

ORDERING INFORMATION

Compact Fluorescent
 Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
28	Quad	GX32d-3	NPF 120V	.6/2				26		1600	10000

Factory Installed Options
 Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
 © 2009

30