



# VAN5F64QTW/E1

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

## DESCRIPTION

### SPECIFICATIONS

#### Backup Battery

Bodine "Coldpak" operates CFL lamp for 90 minutes after power failure. Maintenance free NiCad battery lasts 7-10 years. Rated -18° C to +55°C

#### Refractor:

Injection molded polycarbonate, designed for maximum structural strength

#### Ballast Minimum Starting Temperature:

0° F

#### UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

#### E1:

Wired for 120V

#### Patents:

Pat. D547,484


#### Color:

White

#### Weight:

12.2

### DIMENSIONS

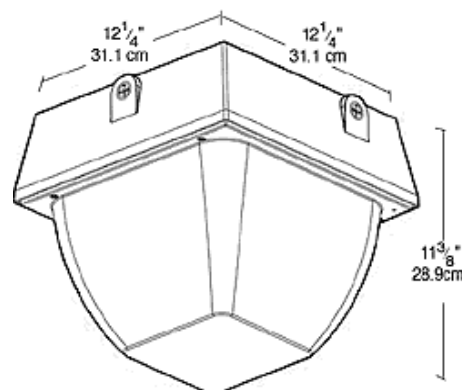

## ORDERING INFORMATION

**Compact Fluorescent**  
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
64	2-32W Triple	GX24q-3	Elec HPF QT	0.57			0.25	36		4800	12000

#### Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice

**RAB Lighting, Inc.** • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • [www.rabweb.com](http://www.rabweb.com)  
© 2009