



VAN5F64QTW/E2

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

SPECIFICATIONS

Backup Battery

Bodine "Coldpak" operates CFL lamp for 90 minutes after power failure. Maintenance free NiCad battery lasts 7-10 years. Rated -18° C to +55° C

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Ballast Minimum Starting Temperature:

0° F

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

E2:

Wired for 277V

Patents:

Pat. D547,484


Color:

White

Weight:

12.2

DIMENSIONS

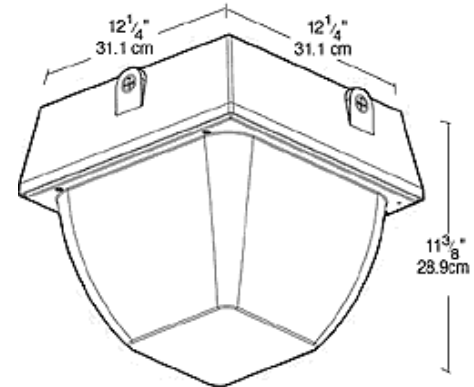

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

| Total Watts | Lamp Type | Lamp Base | Ballast | Starting Amps/ Operating Amps | | | | Input Watts | LAMP ANSI | Initial Lumens | Lamp Hours |
|----------------|-----------------|--------------|-------------|-------------------------------|------|------|------|----------------|--------------|-------------------|---------------|
| | | | | 120V | 208V | 240V | 277V | | | | |
| 64 | 2-32W Triple | GX24q-3 | Elec HPF QT | 0.57 | | | 0.25 | 36 | | 4800 | 12000 |

Factory Installed Options
Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2009