



VAN5F84QTW/E2

JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

SPECIFICATIONS

Backup Battery

Bodine "Coldpak" operates CFL lamp for 90 minutes after power failure. Maintenance free NiCad battery lasts 7-10 years. Rated -18° C to +55° C

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Ballast Minimum Starting Temperature:

0° F

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

E2:

Wired for 277V

Patents:

Pat. D547,484


Color:

White

Weight:

12.67

DIMENSIONS

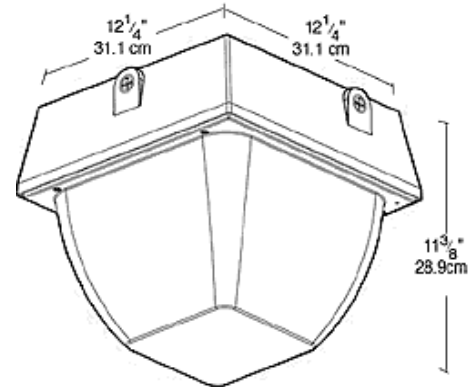

ORDERING INFORMATION

Compact Fluorescent
 Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
84	2-42W Triple	GX24q-4	Elec HPF QT	0.78	0.5	0.5	0.33	93		6400	12000

Factory Installed Options
 Add suffix to Catalog Number

Note: Specifications may change without notice