



VANGF42QT/E2

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

SPECIFICATIONS

Backup Battery

Bodine "Coldpak" operates CFL lamp for 90 minutes after power failure. Maintenance free NiCad battery lasts 7-10 years. Rated -18° C to +55°C

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Ballast Minimum Starting Temperature:

0° F

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

E2:

Wired for 277V

Patents:

Pat. D547,484


Color:

Bronze

Weight:

16.18

DIMENSIONS

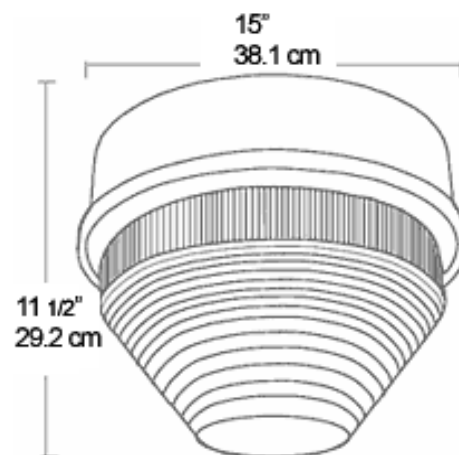

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
42	42W Triple	GX24q-4	Elec HPF QT	0.38	0.3	0.2	0.17	46	0	3200	12000

Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2009