

# RAB LIGHTING

## VAN1FS13



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

### DESCRIPTION

Self ballasted CFL lamp included with fixture for energy efficient lighting, cool operation and long life!

### SPECIFICATIONS

#### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

#### Refractor:

Injection molded polycarbonate, designed for maximum structural strength

#### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver

#### Sockets:

Plug-in type, thermoplastic

#### Ballast Minimum Starting Temperature:

-20

#### UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

#### Lamp:

13W Self ballasted CFL lamp included for cool operation, long life and energy efficient lighting

#### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws


#### Color:

Bronze

#### Weight:

2.58

### DIMENSIONS

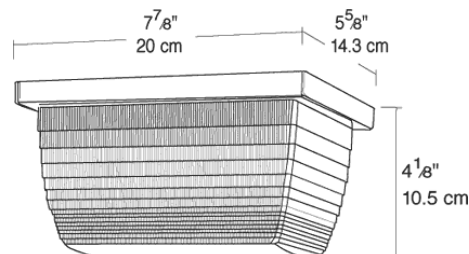

### ORDERING INFORMATION

**Compact Fluorescent**  
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
13	Spiral	Medium Screw	

Starting Amps/ Operating Amps			
120V	208V	240V	277V

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
0		870	10000

**Factory Installed Options**  
Add suffix to Catalog Number

Note: Specifications may change without notice

**RAB Lighting, Inc.** • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • [www.rabweb.com](http://www.rabweb.com)  
© 2009