

RAB LIGHTING

VAN1F14



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Compact fixture: 7, 9, 13, or 14 watt fluorescent. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. CFL lamp supplied.

SPECIFICATIONS

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver

Sockets:

Plug-in type, thermoplastic

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Ballast Minimum Starting Temperature:

0

Lens:

Clear

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN1BB


Color:

Clear

Weight:


2.83

DIMENSIONS

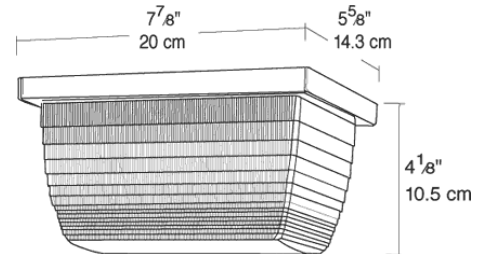

PHOTOMETRIC

75w Incandescent @ 8' Mounting Height

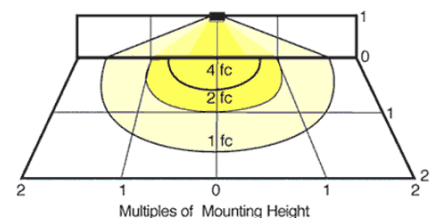

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Multiplier	Watts Incan	CFL
.3	7	.3
.5	9	.5
.7	13	.7
.7	14	.7
1.0	75	1.0

ORDERING INFORMATION

Compact Fluorescent
 Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
14	2-7W Twin	G23	NPF 120V

Starting Amps/ Operating Amps			
120V	208V	240V	277V
0.34			

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
18		800	10000

Factory Installed Options
 Add suffix to Catalog Number

Swivel Photocontrol (/PCS)
 Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
 © 2009