

# RAB LIGHTING

## VAN1F9



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

### DESCRIPTION

Compact fixture: 7, 9, 13, or 14 watt fluorescent. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. CFL lamp supplied.

### SPECIFICATIONS

#### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

#### Refractor:

Injection molded polycarbonate, designed for maximum structural strength

#### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver

#### Sockets:

Plug-in type, thermoplastic

#### UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

#### Ballast Minimum Starting Temperature:

0

#### Lens:

Clear

#### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

#### Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN1BB


#### Color:

Clear

#### Weight:


2.58

### DIMENSIONS

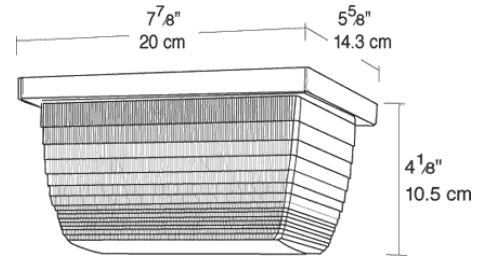

### PHOTOMETRIC

75w Incandescent @ 8' Mounting Height

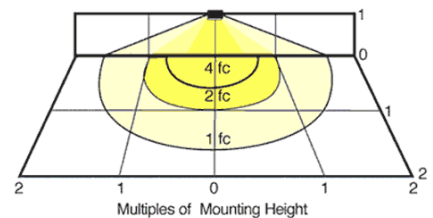

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Multiplier	Watts Incan	CFL
.3	7	.3
.5	9	.5
.7	13	.7
.7	14	.7
1.0	75	1.0

### ORDERING INFORMATION

**Compact Fluorescent**  
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
9	9W Quad G23		NPF 120V

Starting Amps/ Operating Amps			
120V	208V	240V	277V
0.14			

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
10		525	10000

**Factory Installed Options**  
Add suffix to Catalog Number

Swivel Photocontrol (/PCS)  
Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice

**RAB Lighting, Inc.** • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com  
 © 2009