

VAN1F9W

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Compact fixture: 7, 9, 13, or 14 watt fluorescent. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. CFL lamp supplied.

SPECIFICATIONS

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver

Sockets:

Plug-in type, thermoplastic

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Ballast Minimum Starting Temperature:

0

Lens:

White

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN1BB


Color:

Clear

Weight:


2.58

DIMENSIONS

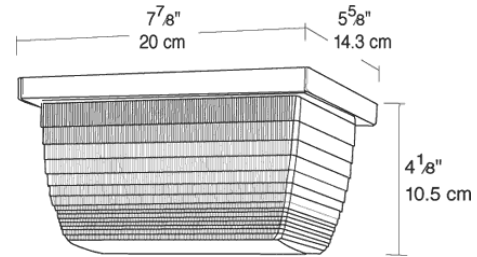

PHOTOMETRIC

75w Incandescent @ 8' Mounting Height

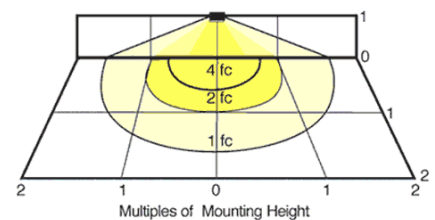

| Mounting Height | Multiplier |
|-----------------|------------|
| 8' | 1.0 |
| 9' | .8 |
| 10' | .7 |
| 12' | .4 |
| 14' | .3 |

| Multiplier | Watts Incan | CFL |
|------------|-------------|-----|
| .3 | 7 | .3 |
| .5 | 9 | .5 |
| .7 | 13 | .7 |
| .7 | 14 | .7 |
| 1.0 | 75 | 1.0 |

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

| Total Watts | Lamp Type | Lamp Base | Ballast |
|-------------|-------------|-----------|----------|
| 9 | 9W Quad G23 | | NPF 120V |

| Starting Amps/ Operating Amps | | | |
|-------------------------------|------|------|------|
| 120V | 208V | 240V | 277V |
| 0.14 | | | |

| Input Watts | LAMP ANSI | Initial Lumens | Lamp Hours |
|-------------|-----------|----------------|------------|
| 10 | | 525 | 10000 |

Factory Installed Options
Add suffix to Catalog Number

Swivel Photocontrol (/PCS)
Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice