

VAN2F26QT

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Medium size fixture: 26 and 32 watt compact fluorescent lamp. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor.

SPECIFICATIONS

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver

Sockets:

Plug-in type, thermoplastic

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Ballast Minimum Starting Temperature:

0

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN2BB

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

Color:


Clear

Weight:

3.6

PHOTOMETRIC

75w Incandescent @ 8' Mounting Height

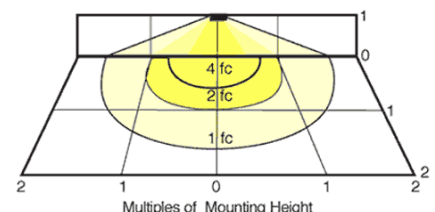

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Multiplier	Watts Incan	CFL
1.5	26	1.5
.2	32	.2
1.0	75	1.0

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
26	26W Triple	GX24q-3	Elec HPF QT

Starting Amps/ Operating Amps			
120V	208V	240V	277V
0.24	0.2	0.18	0.11

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
29		1800	12000

Factory Installed Options
Add suffix to Catalog Number

Swivel Photocontrol (/PCS)
Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice