

Fluorescent or Incandescent

## INSTALLATION INSTRUCTIONS

### IMPORTANT

**READ CAREFULLY BEFORE INSTALLING FIXTURE.  
RETAIN INSTRUCTIONS FOR FUTURE REFERENCE.**

RAB Vandalproof fixtures must be wired in accordance with the National Electrical Code and applicable local codes. Proper grounding is required for safety.

Vandalproof fixtures are for indoor or outdoor use and should not be used in areas with limited ventilation or high ambient temperatures. Installation should be done by a qualified electrician.

***WARNING:*** Make certain power is OFF before installing or maintaining fixture.

### LOCATION

Fixture can be wall or ceiling mounted.

Fixture should not be recessed.

### MOUNTING

1. Remove lens from fixture.
2. Attach universal crossbar to junction box with two screws provided.
3. Thread mounting nipple (provided) through center hole of fixture and into the crossbar. Tighten locknut.
4. Connect fixture leads to supply leads with wire nuts.
5. Install lamp and replace lens.

## VAN4 INSTALLATION INSTRUCTIONS

(continued )


### TAMPERPROOF SCREWS

RAB Vandalproof fixtures are shipped with both standard Phillips head screws and tamperproof screws.

For maximum security, use tamperproof screws. Tighten with Center Pin Torx screwdriver (catalog #Vandriver).

### WIRING

1. Connect the black fixture lead to the black supply lead.
2. Connect the white fixture lead to white supply lead.
3. Connect supply ground wire to fixture ground screw.

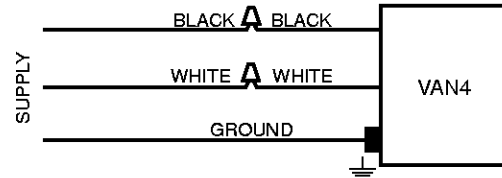

### RE-LAMPING

**Caution:** Prior to installing, check that the lamp is of proper type and wattage. Observe lamp manufacturer's recommendations on lamp operation, ballast type and burning positions.

Disconnect power. Make sure fixture and lamp are cool enough to touch.

1. Loosen screws holding refractor.
2. Remove refractor and install lamp.
3. Close refractor and re-install screws.

Catalog #	Lamp type (not supplied)
VAN4F26	2-13w PLC, GX23 base
VAN4I	2-60w incandescent, medium base

**NOTE:** Minimum starting temperature of fluorescent fixture is 25°F (-7°C).

### CLEANING

**CAUTION:** Be sure power is off. Be sure fixture temperature is cool enough to touch.

Clean Reflector and lens with a cloth moistened with non abrasive glass cleaning solution.

### TROUBLESHOOTING CHECKLIST

**Check that:**

1. Proper lamp is installed. Lamp is not faulty.
2. Line voltage at the fixture is proper.
3. Fixture is wired properly.
4. Fixture is grounded properly.

#### Easy Installation & Product Help

**Fax Back**  
Faxed Tips & Specs,  
24 hours/day.  
888 RAB-1236

**Tech Help Line**  
Call our friendly experts.  
8AM - 5PM ET Mon. - Fri.  
888 RAB-1000

**www.rabweb.com**  
Visit our internet site for  
color product photos  
and installation tips.

**e-mail**  
Your questions and requests  
will be answered promptly.  
tech@rabweb.com



THESE INSTRUCTIONS DO NOT COVER ALL DETAILS OR VARIATIONS IN EQUIPMENT, NOR DO THEY PROVIDE FOR EVERY POSSIBLE CONTINGENCY TO BE MET IN CONNECTION WITH INSTALLATION, OPERATION OR MAINTENANCE.