



# VAN4F42QT



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

## DESCRIPTION

Large size fixture: 52 watt compact fluorescent. Reflector is die formed heavy gauge steel in white finish with clear polycarbonate refractor. Lamp supplied.

## SPECIFICATIONS

### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

### Refractor:

Injection molded polycarbonate, designed for maximum structural strength

### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER)

### Sockets:

Plug-in type, thermoplastic

**Ballast Minimum Starting Temperature:**  
0

### UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

### Photocontrol:

See product number VAN4F42QT/PC

### Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts


### Color:

Clear

### Weight:


6.35

## DIMENSIONS

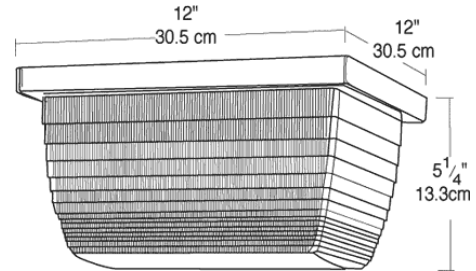

## PHOTOMETRIC

150w Incandescent @ 8' Mounting Height

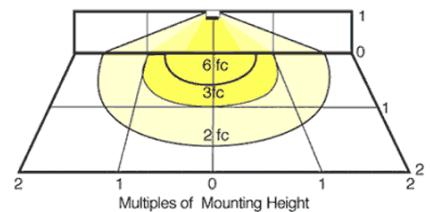

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Watts	Multiplier Incan	CFL
52		1.5
150	1.0	

## ORDERING INFORMATION

**Compact Fluorescent**  
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
42	42W Triple	GX24q-4	Elec HPF QT

Starting Amps/ Operating Amps			
120V	208V	240V	277V
0.38	0.3	0.2	0.17

Input Watts	LAMP ANSI Lumens	Initial Lumens	Lamp Hours
46		3200	12000

**Factory Installed Options**  
Add suffix to Catalog Number

Swivel Photocontrol (/PCS)  
Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice

**RAB Lighting, Inc.** • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com  
 © 2009