


RAB

VAN6 Vandalproof Fixture

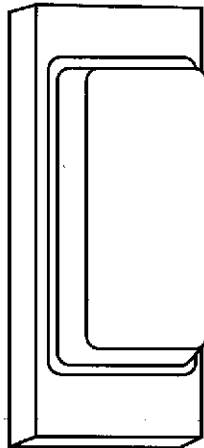

INSTALLATION INSTRUCTIONS

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE.

RAB's Vandalproof fixtures must be wired in accordance with the National Electrical Code and applicable local codes. Proper grounding is required to insure personal safety. Carefully observe grounding procedure. Vandalproof fixtures are for outdoor use and should not be used in areas with limited ventilation or high-ambient temperatures. All work should be done by a qualified electrician.

WARNING Make certain power is OFF before installing or maintaining fixture.

LOCATION

Fixture should be located on wall or ceiling at least 18" below any overhang or other structural detail. Fixture should not be recessed.

MOUNTING

1. Remove lens from fixture.
2. Attach universal crossbar to junction box with two screws provided.
3. Thread mounting nipple (provided) through center hole of fixture and into the crossbar. Tighten locknut.
4. Connect fixture leads to supply leads with wire nuts.
5. Install lamp and replace lens.

INSTALLATION of TAMPERPROOF SCREWS

RAB Vandalproof fixtures are shipped with standard screws installed and tamperproof screws shipped with the fixture packed separately.


For maximum security, insert tamperproof screws into both corners of the lens and tighten with Tamperproof screwdriver (catalog #vandriver).

VAN6 INSTALLATION INSTRUCTIONS

(continued)

WIRING

1. Connect the black fixture lead to the black supply lead.
 2. Connect the white fixture lead to white supply lead.
 3. Fixture ground lead must be connected to supply ground.
- Make sure connections are secure using wirenuts, crimp-on lugs or other approved connecting devices.

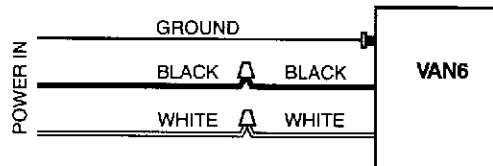

RE-LAMPING

Caution: Prior to installing, check that the lamp is of proper type and wattage. Observe lamp manufacturer's recommendations on lamp operation, ballast type and burning positions.

Disconnect power.
Make sure fixture and lamp are cool enough to touch.

Remove screws holding lens, remove lens and set aside.
Close lens and re-install screws

CLEANING

Caution: Be sure fixture temperature is cool enough to touch.

Clean Reflector and lens with non abrasive glass cleaning solution or detergent. Rinse with clean water.

FACTORY INSTALLED OPTIONS

add suffix to catalog number

/PC 120 volt Photocell mounted in backbox.
/W White lens

TROUBLE SHOOTING CHECKLIST

Check that:

1. Proper lamp is installed. Lamp is not faulty.
2. Line voltage at the fixture is proper.
3. Fixture is wired properly.
4. Fixture is grounded properly.