

# VAN6F26W/277

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

## DESCRIPTION

Versatile wall and ceiling fixture in 13 and 26 watt fluorescent. Housing is die cast aluminum bronze finish with clear vandalproof polycarbonate refractor. Photocontrol & sensor models available. Lamp supplied.

## SPECIFICATIONS

### HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure

### Housings:

Die cast aluminum with powder coat bronze or white finish

### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

### Refractor:

Injection molded polycarbonate, designed for maximum structural strength

### Sockets:

HPS: Medium base 4kv Pulse Rated Glazed porcelain CFL: Plug-in type, thermoplastic

### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER)

### UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

### Ballast Minimum Starting Temperature:

32

### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws


### Color:

White


### Weight:

5.1

## DIMENSIONS

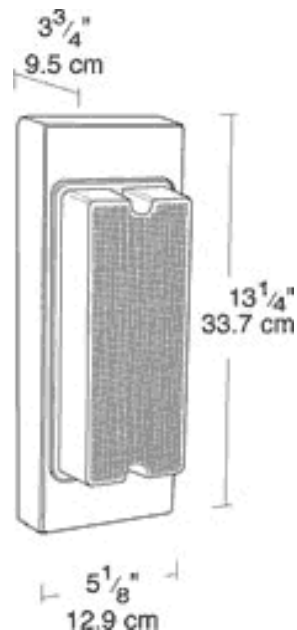

## PHOTOMETRIC

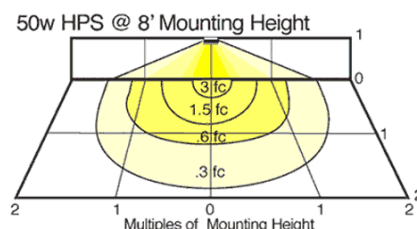

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Watts	Multiplier HPS	CFL
35	.6	
50	1.0	
13		.2
26		.4

## ORDERING INFORMATION

### Compact Fluorescent

Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
26	2 - 13W Twin	GX23	NPF 277V

Starting Amps/ Operating Amps			
120V	208V	240V	277V
			0.2

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
38		1800	10000

### Factory Installed Options

Add suffix to Catalog Number

Swivel Photocontrol (/PCS)  
Quartz Restrike (HPS & MH only) (/QR)

Mini Motion Sensor (/MS)  
Button Photocontrol (/PC)

Note: Specifications may change without notice