



VAN11F26



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

11" or 15" round fixture. 52 & 64 watt Fluorescent lamp (supplied), or 75 or 150 watt incandescent lamp (not supplied). Backplate is die formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor.

SPECIFICATIONS

Fluorescent Ballast Starting Temperatures: Sockets:

Electronic QT: 0° F/ -18° C NPF 120V:
 32° F / 0° C

HPS & MH: Medium base 4kv Pulse Rated
 Glazed porcelain CFL: Plug-in type,
 thermoplastic
 UL Listing.

HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Ballast Minimum Starting Temperature:

0

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Photocontrol:

See product number VAN11F26/PC

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER)

Color:


Clear

Weight:

5.5

PHOTOMETRIC

150w Incandescent @ 8' Mounting Height

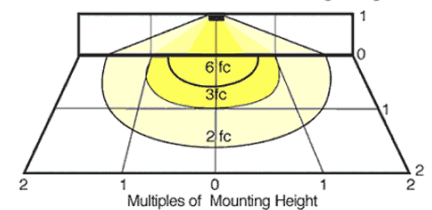

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Watts	Multiplier	Incan	CFL
60	.4		
75	.5		
120	.7		
150	1.0		
52		1.5	

ORDERING INFORMATION

Compact Fluorescent
 Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
26	2-13w Twin	GX23	NPF 120V

Starting Amps/ Operating Amps
 120V 208V 240V 277V

Input Watts	LAMP ANSI Lumens	Initial Hours
17	1800	10000

Factory Installed Options
 Add suffix to Catalog Number

Swivel Photocontrol (/PCS)
 Quartz Restrike (HPS & MH only) (/QR)

Mini Motion Sensor (/MS)
 Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice