

RAB LIGHTING VAN111



JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

11" or 15" round fixture. 52 & 64 watt Fluorescent lamp (supplied), or 75 or 150 watt incandescent lamp (not supplied). Backplate is die formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor.

SPECIFICATIONS

Fluorescent Ballast Starting Temperatures: Sockets:

Electronic QT: 0° F / -18° C NPF 120V:
32° F / 0° C

HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER)

HPS & MH: Medium base 4kv Pulse Rated
Glazed porcelain CFL: Plug-in type,
thermoelastic
UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN11BB

Color:


Clear

Weight:

3.7

PHOTOMETRIC

150w Incandescent @ 8' Mounting Height

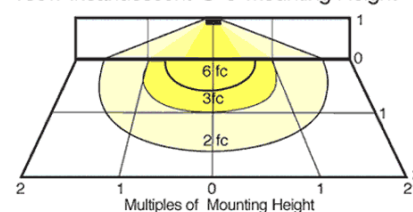

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Watts	Multiplier
60	.4
75	.5
120	.7
150	1.0
52	1.5

ORDERING INFORMATION

Incandescent

Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
60	A-19	Medium	0

Starting Amps/ Operating Amps			
120V	208V	240V	277V
0	0	0	0

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
0	0	890	750

Factory Installed Options

Add suffix to Catalog Number

Swivel Photocontrol (/PCS)

Quartz Restrike (HPS & MH only) (/QR)

Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2009