



VAN15F52QT



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

11" or 15" round fixture. 52 & 64 watt Fluorescent lamp (supplied), or 75 or 150 watt incandescent lamp (not supplied). Backplate is die formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor.

SPECIFICATIONS

Fluorescent Ballast Starting Temperatures: Sockets:

Electronic QT: 0° F/ -18° C NPF 120V:
 32° F / 0° C

HPS & MH: Medium base 4kv Pulse Rated
 Glazed porcelain CFL: Plug-in type,
 thermoplastic
 UL Listing:

HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN15BB

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER)

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

Color:

Clear


Ballast Minimum Starting Temperature:

-22

Weight:

7.08

PHOTOMETRIC

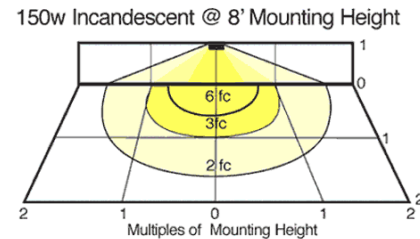

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Watts	Multiplier	Incan	CFL
60	.4		
75	.5		
120	.7		
150	1.0		
52		1.5	

ORDERING INFORMATION

Compact Fluorescent
 Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
52	2-26W Triple	GX24q-3	Elec HPF QT

Starting Amps/ Operating Amps			
120V	208V	240V	277V
0.46			0.21

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
0		3600	12000

Factory Installed Options
 Add suffix to Catalog Number

Swivel Photocontrol (/PCS)
 Quartz Restrike (HPS & MH only) (/QR)

Mini Motion Sensor (/MS)
 Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
 © 2009