



Affordable, high-performance, low-maintenance LED doorway light. Suitable for mounting heights up to 10', and replaces 70W high pressure sodium. 100,000-Hour LED lifespan. 5-Year warranty.

Color: White

Weight: 3.0 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

#### Driver Info

Type: Constant Current  
 120V: 0.3A  
 208V: 0.3A  
 240V: 0.3A  
 277V: 0.3A  
 Input Watts: 14W  
 Efficiency: 83%

#### LED Info

Watts: 12W  
 Color Temp: 5000K (Cool)  
 Color Accuracy: 70 CRI  
 L70 Lifespan: 100,000  
 Lumens: 1,284  
 Efficacy: 89 LPW

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations as downlight. Suitable for mounting within 1.2m (4ft) of the ground.

#### ADA Compliant:

ENTRA™ is ADA Compliant.

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

#### Other

#### ENERGY STAR:

This product is ENERGY STAR® qualified.

#### Reflectors (2):

White aluminum reflector topped with vacuum metalized polycarbonate LED reflector.

#### California Title 24:

ENTRA12 complies with 2013 California Title 24 building and electrical codes as a residential outdoor fixture. See ENTRA12/PC for a model that complies as a commercial outdoor non-pole-mounted fixture ≤ 30 Watts.

#### Equivalency:

ENTRA™ 12W replaces 70W high pressure sodium.

#### Patents:

The design of the ENTRA™ is protected by patents pending in US, Canada, China, Taiwan and Mexico.

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

### Construction

#### IP Rating:

Ingress Protection rating of IP66 for dust and water.

#### Cold Weather Starting:

The minimum starting temperature is -40°F/-40°C.

#### Ambient Temperature:

Suitable for use in 40°C (104°F) ambient temperatures.

#### Thermal Management:

Superior thermal management with internal Air-Flow fins and external air vents.

#### Back Housing:

Die-cast aluminum.

#### Lens/Housing Cover:

Vandal resistant polycarbonate molded housing cover and lens.

#### Mounting:

Heavy die cast aluminum with 1/2" back knockout and mounting template for mounting to 4" box.

#### Recommended Mounting Height:

Up to 10 ft.

#### Gaskets:

High-temperature silicone.

### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

### Green Technology:

Mercury and UV free, and RoHS compliant.

### LED Characteristics

#### LED:

12W multi-chip, long life LED.

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### Correlated Color Temp. (Nominal CCT):

5000K

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period.

#### Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

### Electrical

#### Driver:

Constant Current, Class 2, 100-277V, 50/60Hz, 4kV Surge Protection, 350mA, 100-240VAC: 0.3 - 0.15 A, 277VAC: 0.15 A, Power Factor: 98.5%.


## Technical Specifications (continued)

### Electrical

#### THD:

9.9% at 120V

### Dimensions

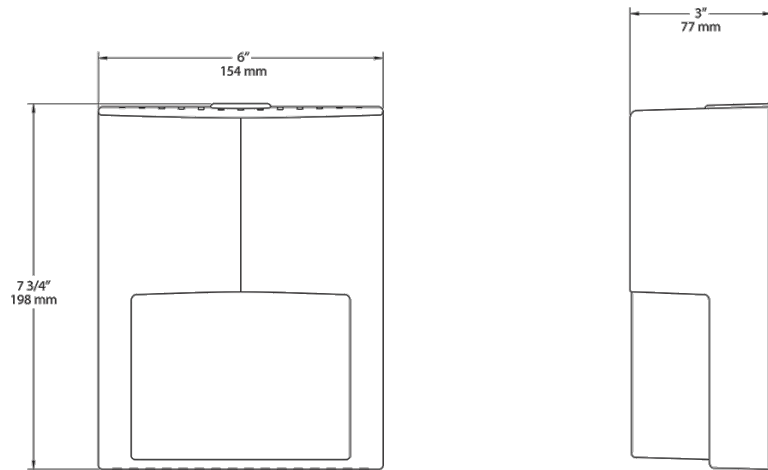

### Features

- Save over \$700 in energy costs over life of fixture
- Equivalent to 70W high pressure sodium
- Durable vandal-resistant polycarbonate housing
- Low-profile and ADA compliant
- 100,000-hour LED lifespan
- 5-Year warranty

### Ordering Matrix

| Family | Watts    | Color Temp                        | Finish                | Photocell  |
|--------|----------|-----------------------------------|-----------------------|--|
| ENTRA  | 12 = 12W | = Cool<br>Y = Warm<br>N = Neutral | = Bronze<br>W = White | /PC = 120V Button<br>/PC2 = 277V Button<br>/PCS = 120V Swivel<br>/PCS2 = 277V Swivel |