

WPLED13W

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

LED 13 Watt Wallpacks

SPECIFICATIONS

Ambient Temperature:

Suitable for use in 50C (122F) ambient temperatures

Cold Weather Starting:

The minimum starting temperature is -30°C

Color Accuracy:

66 CRI

Color Stability:

RAB LED products significantly exceed Energy Star Requirements for Chromatic Stability during LM-80 Testing.

Color Temperature (Nominal CCT):

5000 K

Color Uniformity:

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

Dark Sky Approved:

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

Equivalency:

The WPLED13 is Equivalent in delivered lumens to a 100W Metal Halide Wallpack.

Finish:

Chip and fade resistant polyester powder coat finish.

Fixture Efficacy:

71 Lumens per Watt

For use on LEED Buildings:

IDA Dark Sky Approval means that this fixture can be used to achieve LEED Credits for Light Pollution Reduction.

Gaskets:

High Temperature Silicone

Green Technology:

RAB LEDs are Mercury and UV free.

HID Replacement Range:

The WPLED13 can be used to replace 70-150W Metal Halide Wallpacks based on delivered lumens.

IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

LED Light Engine:

Multi-chip 13W high output long life LED Driver: Constant Current, Class 2 100V - 277V, 50/60 Hz

Lumen Maintenance:

The LED will deliver 70% of its initial lumens at 50,000 hours of operation.

Patents:

The LPACK design is protected under patents pending in the U.S., Canada, China, Taiwan and Mexico.

Surge Protection:

4kv

UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground.

Warranty:

RAB LED fixtures give you peace of mind because both the fixture and light engine components are backed by RAB's 5 Year Warranty. For more information,


Color:

White

Weight:

3.3

DIMENSIONS

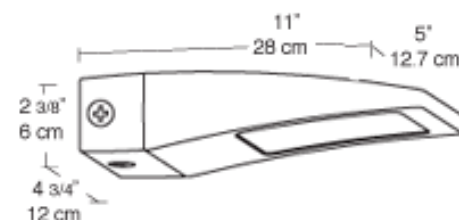

ORDERING INFORMATION

LED	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
Lamp supplied with fixture	13	LED	Thermal	Constant Current	0.3 A	0.3 A	0.3 A	0.15 A	15.0	N/A	1064	50000
Factory Installed Options					Photocontrol for 277V (P/PC)				Photocontrol for 120V (/PC)			
Add suffix to Catalog Number												

Note: Specifications may change without notice