



# WPLED26



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

### DESCRIPTION

LED 26 Watt Wallpacks

### SPECIFICATIONS

**Ambient Temperature:**

Suitable for use in 40C ambient

**California Title 24:**

WPLED complies with California Title 24 building and electrical codes.

**Cold Weather Starting:**

The minimum starting temperature is -40jC

**Color Accuracy:**

66 CRI

**Color Stability:**

RAB LED products significantly exceed Energy Star Requirements for Chromatic Stability during LM-80 Testing.

**Color Temperature (Nominal CCT):**

5169 K (Daylight)

**Color Uniformity:**

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

**Equivalency:**

The WPLED26 is Equivalent in delivered lumens to a 175W Metal Halide Wallpack.

**Fixture Efficacy:**

61 Lumens per Watt

**Finish:**

Chip and fade resistant polyester powder coat finish.

**HID Replacement Range:**

The WPLED26 can be used to replace 150 - 200W Metal Halide Wallpacks based on delivered lumens.

**Heatsink:**

Cast aluminum thermal management system for optimal heat sinking. The LPACK is designed for cool operation, most efficient output and maximum LED life by minimizing LED junction temperature.

**LED Light Engine:**

Multi-chip 26W high output long life LED Driver: Constant Current, 720mA, Class 2, 6 KV Surge Protection, 100V-277V, 50-60 Hz, 100-240V: .4 Amps

**Patents:**

The WPLED design is protected by U.S. PATENT D608,040 and patents pending in the U.S., Canada, China, Taiwan and Mexico.


**Color:**

Bronze

**Weight:**

7.5

### DIMENSIONS

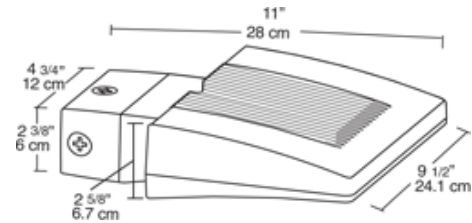

### ORDERING INFORMATION

LED	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
Lamp supplied with fixture	26	LED	Thermal	Constant Current	.4 A/.4 A	.4 A/.4 A	.4 A/.4 A	.4 A/.4 A	30.2	N/A	1816	50000
<b>Factory Installed Options</b> Add suffix to Catalog Number	Photocontrol for 277V (P2)				Photocontrol for 120V (/PC)							

Note: Specifications may change without notice