



WPLED26N



JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

LED 26 Watt Wallpacks

SPECIFICATIONS

Ambient Temperature:

Suitable for use in 40C ambient

California Title 24:

WPLED complies with California Title 24 building and electrical codes.

Cold Weather Starting:

The minimum starting temperature is -40jC

Color Accuracy:

88 CRI

Color Stability:

RAB LED products significantly exceed Energy Star Requirements for Chromatic Stability during LM-80 Testing.

Color Temperature (Nominal CCT):

4179 K (Bright White)

Color Uniformity:

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

Equivalency:

The WPLED26 is Equivalent in delivered lumens to a 175W Metal Halide Wallpack.

Fixture Efficacy:

44 Lumens per Watt

Finish:

Chip and fade resistant polyester powder coat finish.

HID Replacement Range:

The WPLED26 can be used to replace 150 - 200W Metal Halide Wallpacks based on delivered lumens.

Heatsink:

Cast aluminum thermal management system for optimal heat sinking. The LPACK is designed for cool operation, most efficient output and maximum LED life by minimizing LED junction temperature.

LED Light Engine:

Multi-chip 26W high output long life LED
Driver: Constant Current, 720mA, Class 2, 6
KV Surge Protection, 100V-277V, 50-60 Hz,
100-240V: .4 Amps

Patents:

The WPLED design is protected by U.S. PATENT D608,040 and patents pending in the U.S., Canada, China, Taiwan and Mexico.


Color:

Bronze

Weight:

7.5

DIMENSIONS

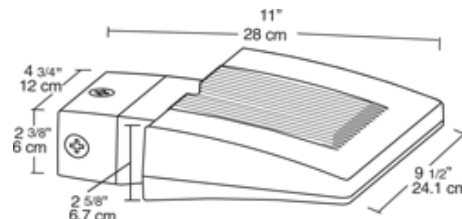

ORDERING INFORMATION

LED	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
Lamp supplied with fixture	26	LED	Thermal	Constant Current	.4 A/.4 A	.4 A/.4 A	.4 A/.4 A	.4 A/.4 A	30.2	N/A	1336	50000
Factory Installed Options					Photocontrol for 277V (P/PC2)							
Add suffix to Catalog Number					Photocontrol for 120V (/PC)							

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2011 RAB Lighting, Inc.