

WPTF28W

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Compact Fluorescent Tallpack. Vandal resistant polycarbonate housing. Heavy die-cast aluminum back plate with 1/2" bottom and back conduit knockout. Factory installed photocontrol optional. Lamp supplied.

SPECIFICATIONS

Back Plate:

Heavy die cast aluminum. 1/2" bottom conduit knockout. Knockouts for mounting to 3" or 4" junction boxes

Ballast Housing:

Stamped steel painted white

Reflector:

Die formed aluminum for wide light distribution

UL Listing:

Suitable for wet locations

Ballast Minimum Starting Temperature:
14

Housing:

Vandal resistant polycarbonate housing

Patents:

The unique RAB Tallpack is protected by U.S. Patent D569,029; China Patent ZL200730149211.2; Taiwan Patent D124,864 and Canada Patent D121,993

Refractor:

Prismatic polycarbonate refractor for wide light distribution

Socket:

GX32d-3


Color:

White

Weight:


55.3

DIMENSIONS

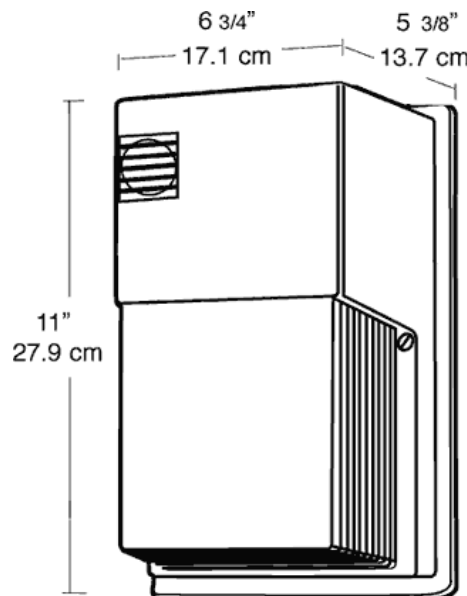

PHOTOMETRIC

70w HPS @ 10' Mounting Height

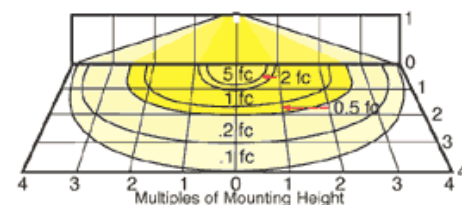

Mounting Height	Multiplier	HPS Watts	Multiplier	CFL Watts	Multiplier
8'	1.6	100	1.5	22	.2
10'	1.0	70	1.0	42	.5
12'	.7	50	.6		
16'	.4	35	.4		
20'	.25				
MH Watts Multiplier		100	1.4		

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
28	Quad	GX32d-3	NPF 120V

Starting Amps/ Operating Amps			
120V	208V	240V	277V
<hr/>			
.6/2			

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
26		1600	10000

Factory Installed Options
Add suffix to Catalog Number

Tamperproof screws (/TP)
Swivel Photocontrol (/PCS)
Single fusing for 120 and 277 volt (/F)

Double fusing for 208 and 240 volt (/FF)
Button Photocontrol (/PC)

Note: Specifications may change without notice