

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Cutoff Wallpack. Lens is flat with tempered glass. Lamp supplied.

SPECIFICATIONS

Finish:

Chip and fade resistant polyester powder coating.

Housing:

Die cast aluminum, 1/2" NPS tapped top, both sides and back for conduit or photocontrol. Hinged refractor. Continuous one piece silicone rubber gasket.

Reflector:

Semi-Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

Conduit Openings:

Top, side, and back

UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from the ballast.

Patents:

Pat. D440,683

Photocontrol:

Button Photocontrol installed and wired for 120V

Template:

Drilling template for easy wall box mounting


Color:

White

Weight:


8.7

DIMENSIONS

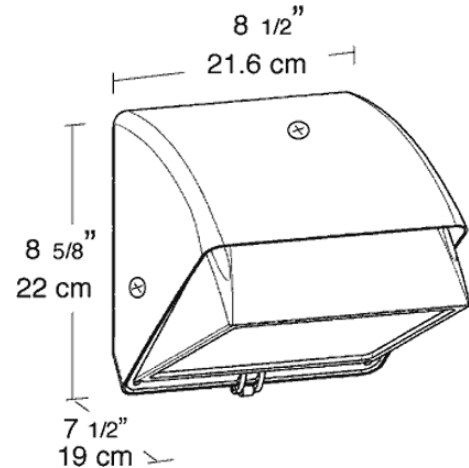

PHOTOMETRIC

70w MH @10' Mounting Height

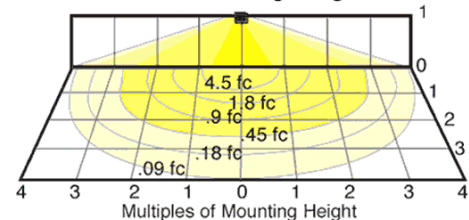

| Mounting Height | Multiplier | Watts | Multiplier | HPS | MH | CFL |
|-----------------|------------|-------|------------|-----|----|-----|
| 8' | 1.6 | 100 | 1.7 | 1.6 | | |
| 10' | 1.0 | 70 | 1.1 | 1.0 | | |
| 12' | .7 | 50 | .7 | .6 | | |
| 16' | .4 | 42 | | | | .6 |
| 20' | .25 | 35 | .4 | | | |

ORDERING INFORMATION

High Pressure Sodium
Lamp supplied with fixture

| Total Watts | Lamp Type | Lamp Base | Ballast |
|-------------|-----------|-----------|------------|
| 100 | ED17 | Medium | R-NPF 120V |

| Starting Amps/ Operating Amps | | | |
|-------------------------------|------|------|------|
| 120V | 208V | 240V | 277V |
| <hr/> | | | |
| 3.1/2.1 | | | |

| Input Watts | LAMP ANSI | Initial Lumens | Lamp Hours |
|-------------|-----------|----------------|------------|
| 115 | S54 | 9500 | 24000 |

Factory Installed Options
Add suffix to Catalog Number

Tamperproof screws (/TP)
Swivel Photocontrol (/PCS)
Single fusing for 120 and 277 volt (/F)

Button Photocontrol wired for 208 - 277 volt (/PC2)
Button Photocontrol (/PC)

Note: Specifications may change without notice