RAB LIGHTING

WP3FCH250PSQ/

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Fully shielded, Full Cutoff wallpack. Full Cutoff optics with flat tempered glass lens. EZ mount knockouts for easy wiring. Lamp supplied.

SPECIFICATIONS

Finish:
Chip and fade resistant polyester powder coating.

Housing:
Die cast aluminum 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame, Continuous silicone rubber gasket.

Reflector:
Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

UL Listing:
Suitable for wet locations. HID fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from the ballast.

Patents:
RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws .

Color:
Bronze

Weight:
27.1

DIMENSIONS

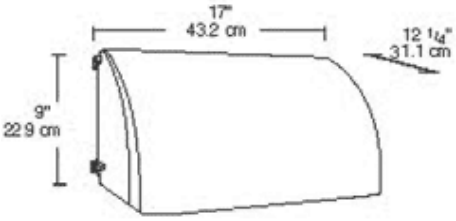

ORDERING INFORMATION

	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps 120V	208V	240V	277V	Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
Lamp supplied with fixture	250								0			

Factory Installed Options
Add suffix to Catalog Number

Tamperproof screws (/TP)	Quartz Restrike (/QR)
Swivel Photocontrol (/PCS)	Double fusing for 208 and 240 volt (/FF)
Single fusing for 120 and 277 volt (/F)	Button Photocontrol wired for 208 - 277 volt (/PC2)
	Button Photocontrol (/PC)
	480 volt on lb ballast (/480)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave• Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com

© 2010 RAB Lighting, Inc.