

# RDI RADIUS ARCHITECTURAL WALLPACK

Cat.#		Approvals
Job	Type	



## APPLICATIONS


- Architectural wallpack stylish Radius shape with molded lines to accentuate building architecture. Provides excellent illumination in three distributions as well as safety with Egress option

## SPECIFICATIONS

- Full cut-off, dark sky, neighbor friendly
- Die cast aluminum housing and door
- Tempered, impact-resistant, clear glass lens
- Energy-saving LED, Pulse Start Metal Halide and Electronic Fluorescent systems
- Three distributions: (see below for restrictions) FT - forward throw for area lighting, WT - wide lateral throw for maximum spacing and UD - Up/Down accent distribution
- Five powder coat standard finishes
- Egress options for 120V or 12V remote power (by others)
- LED color temperature 5000K
- CFL lamps color temperature 3500K
- HID lamps are medium base

## LISTINGS

- 1598 UL listed for use in wet locations

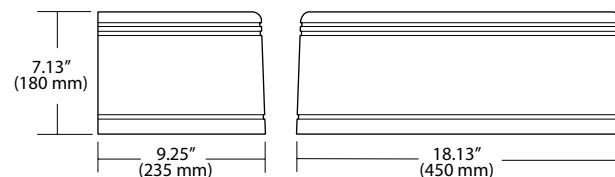

## ORDERING INFORMATION

### ORDERING EXAMPLE

RDI	—	150P6	—	FT	—	BZ	—	EM
Series		Wattage/Source/Voltage		Distribution		Finish		Options
SERIES		WATTAGE/SOURCE/VOLTAGE		DISTRIBUTION		FINISH		OPTIONS
RDI	Radius Sconce	LED		FT Forward Throw <sup>2</sup>		BZ Bronze		QST <sup>5</sup> Time delay quartz standby system energizes quartz socket when main lamp does not strike (HID only)
		50L8-5K <sup>3,6</sup> 47.5w LED 120-277V		WT Wide Throw <sup>2</sup>		BL Black		EM Double contact bayonet socket only for use with 120V remote power (generator by others)
		50LF-5K <sup>3,6,7</sup> 56w LED 347V		UD Up/Down		GR Gray		EM12 Two-pin 12V socket for MR11/MR16 lamps (backup power by others)
		Pulse Start <sup>1</sup>				WH White		PC(X) Button photocontrol. Specify voltage 1-120V, 2-208V, 3-240V, 4-277V, F-347V
		150P6 150w PS Tritap				PL Platinum		BOC(X) 0°C battery backup for one CFL lamp provides 90 minutes backup power specify 1-120V, 4-277V, F-347V
		100P6 100w PS Tritap						
		70P6 70w PS Tritap						
		50P6 50w PS Tritap						
		CFL <sup>1</sup>						
		26F8 26 CFL 120-277V						
		32F8 32 CFL 120-277V						
		42F8 42 CFL 120-277V						
		52F8 <sup>3</sup> 2x26 CFL 120-277V						
		64F8 <sup>3</sup> 2x32 CFL 120-277V						
		84F8 <sup>3</sup> 2x42 CFL 120-277V						
		26FF 26 CFL 347V						
		32FF 32 CFL 347V						
		42FF 42 CFL 347V						
		52FF <sup>3</sup> 2x26 CFL 347V						
		64FF <sup>3</sup> 2x32 CFL 347V						
		84FF <sup>3</sup> 2x42 CFL 347V						
		Metal Halide <sup>1</sup>						
		175H6 175W MH Tritap						
		High Pressure Sodium <sup>1</sup>						
		100S6 100W HPS Tritap						
		150S6 150W HPS Tritap						

- Lamp(s) included
  - IDA approved
  - Available in WT distribution only
  - BOC option not available with UD, up/down distribution
  - 100w D.C. bayonet lamp included
  - PC is only option
  - Step down transformer included
- Color Temperature: CFL lamps 3500K, LED 5000K