

Path or Border Lights EL177, EL180, EL185, BN179, BN182, BN187 Installation Instructions

IMPORTANT SAFETY INSTRUCTIONS



WARNING: Instructions pertaining to risk of fire or injury to persons. Lighted lamps are hot.



WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Portable spear or tree mounts using a cord and plug, must be plugged into a receptacle protected by a Ground Fault Circuit Interrupter (GFCI) in accordance with the National Electrical Code. Failure to take these steps may result in serious personal injury.

MAINTENANCE: Fixtures must be kept clean and free of dirt, dust, leaves and trash. For optimum performance a regularly scheduled maintenance program should be followed.


KEEP THIS SHEET FOR FUTURE REFERENCE.

Tools Required: ☐ Adjustable Wrench

INSTALLATION INSTRUCTIONS:



Make certain electrical supply is **OFF** before starting fixture installation.

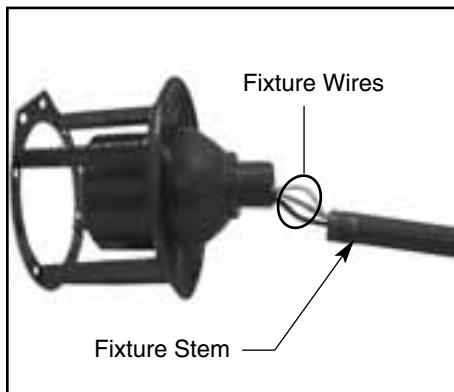

1. Feed wires through stem (short threaded end first), thread pole into fixture body and tighten securely.



2. Coat threads with a good sealant and install stem into desired junction box.



3. Make all necessary connections observing polarity, i.e. green-to-ground, white-to-common, and black-to-voltage.



4. Install lamp of proper type and wattage shown on fixture label & chart on page 2. Do not exceed maximum wattage.




5. Install lens.



6. Insert tabs on hood assembly into fixture slots and hinge cover down to latch.

Path or Border Lights EL177, EL180, EL185, BN179, BN182, BN187

Installation Instructions

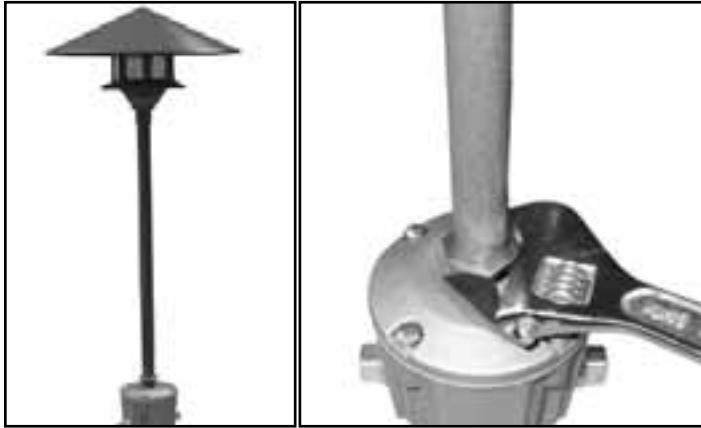

LAMP INFORMATION		
CAT. NO.	LAMP TYPE	MAX. WATTS
EL177 EL180 EL185 BN179 BN182 BN187	A19	60

7. Rotate stem to align fixture and tighten locknut securely.

KIM LIGHTING LIMITED WARRANTY

When installed in accordance with Kim Installation Instructions and accepted trade practices, the following shall apply:

General Product Limited Warranty Coverage

All material and component parts used in the manufacture of Kim Products, are warranted to be free from defects of material and/or workmanship for a period of 1 year from date of sale, with the following exceptions:

Auxiliary Equipment:

All auxiliary equipment (such as lamps, ballasts, and transformers) provided by and/or included in Kim Products shall carry the components manufacturer's warranty.

Copper, Bronze and Brass Landscape Components

Copper and Bronze Landscape fixture components shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 25 years from date of sale.

Kim Lighting's brass components are constructed from several brass parts that are manufactured by various methods at various times. Since brass naturally deepens in color as it ages through the normal oxidation process, these parts may exhibit subtle differences in coloration when the product is new. This is normal and expected. These color differences will be eliminated shortly after installation through the normal brass oxidation process.

Composite In-Grade Components

Composite In-Grade fixture components installed below grade, shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 7 years from date of sale.

Aluminum Landscape Components

Aluminum Landscape fixture components not in direct contact with soil, shall be warranted against defects of material and/or workmanship for a period of 3 years from date of sale. Aluminum fixture components in direct contact with soil shall be warranted from defects of material and failure from corrosion for a period of 1 year from date of sale.

Limit of Liability and General Conditions

Only products which are installed, used and maintained in accordance with applicable Kim instructions, specifications and accepted trade practices, are covered by the Kim Warranty. During the warranty period, with proof of purchase, Kim will repair or replace with the same or similar product, at Kim's option without charge. Labor costs are the owner's responsibility and are excluded from this warranty. This warranty is void if the product is modified, tampered with, misapplied, poorly installed, improperly maintained, or subjected to abnormal conditions.

Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, expressed, or implied, including any implied warranty of fitness for a particular application. Kim Lighting shall not be liable to the purchaser for indirect or consequential damages.



KIM LIGHTING

How may we serve you better?
Please let us know. Visit our website at: www.kimlighting.com
Your input matters to us.