



ALED Area Light mounts to 4" square steel poles at 15'-20'. 1 to 4 ALEDs can be mounted to each pole. IESNA Full Cutoff, Fully shielded optics. 5 year warranty.

Color: Bronze

Weight: 5.1 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type:	Constant Current	Watts:	20W
120V:	0.19A	Color Temp:	3000K (Warm)
208V:	N/A	Color Accuracy:	70 CRI
240V:	N/A	L70 Lifespan:	100,000
277V:	N/A	Lumens:	985
Input Watts:	22W	Efficacy:	45 LPW
Efficiency:	92%		

## Technical Specifications

### Other

#### ALED20 with Photocell:

120V Photocell Included. Photocell is only compatible with 120V.

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

#### Patents:

The ALED20 design is protected under patents pending in Canada, U.S., China, Taiwan and Mexico.

#### Equivalency:

The ALED20 is Equivalent in delivered lumens to a 50W Metal Halide Area Light.

#### HID Replacement Range:

The ALED20 can be used to replace 35 - 70W Metal Halide Area Lights based on delivered lumens.

#### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

#### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

#### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

#### GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

#### Listings

##### UL Listing:

Suitable for wet locations

##### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

##### Dark Sky Approved:

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

#### LED Characteristics

##### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

##### Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

##### Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

##### Color Uniformity:

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

##### Color Accuracy:

70 CRI

#### Color Temperature (Nominal CCT):

3000K

#### Construction

##### IP Rating:

Ingress Protection rating of IP66 for dust and water

##### IES Classification:

The Type III distribution is ideal for roadway, general parking, and other area lighting applications where a larger pool of lighting is required. It is intended to be located near the side of the area, allowing the light to project outward and fill the area.

##### Housing:

Precision die cast aluminum housing, lens frame and mounting plate.

##### Gaskets:

High temperature silicone.

##### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

##### Effective Projected Area:

EPA = 0.23.

##### Green Technology:

RC LEDs are Mercury, Arsenic and UV free.

## Technical Specifications (continued)

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -40°F/-40°C.

#### Ambient Temperature:

Suitable for use in 50°C (122°F) ambient temperatures.

#### EPA:

0.10.

#### Thermal Management:

Integral cast aluminum mounting pad and external fins for optimal heat sinking to ensure cool operation with maximum LED life and light output.

### Two Mounting Options:

Junction Box with 5 Conduit Entry Points and Threaded Plugs for surface mounting plus Cover Plate for mounting over 4" recessed junction box included.

### For use on LEED Buildings:

IDA Dark Sky Approval means that this fixture can be used to achieve LEED Credits for Light Pollution Reduction.

### Optical

#### Lumen Maintenance:

The LED will deliver 70% of its initial lumens at 100,000 hours of operation.

#### Fixture Efficacy:

45 Lumens per Watt

### Electrical

#### Total Harmonic Distortion:

THD = 8.1%.


#### Driver:

Automatic Voltage Sensing Driver for 120-277 volts.

#### Driver:

Two Multi-chip 10W high output long life LED Driver Constant Current, Class 2

## Dimensions

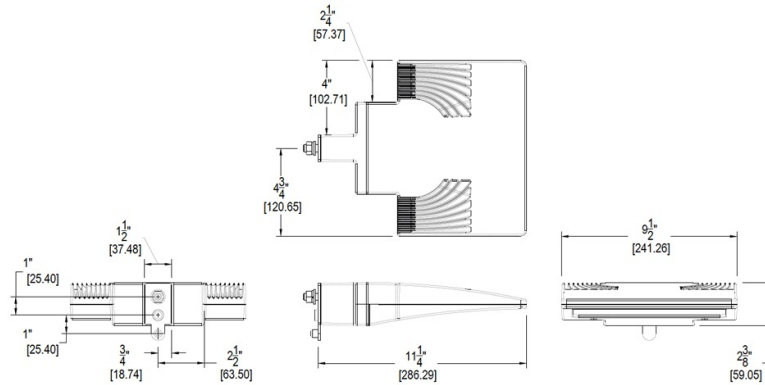

## Features

- High output LED light engine
- Maintains 70% of initial lumens at 100,000 hours
- Weatherproof high temperature silicone gaskets
- Superior heat sinking with die cast aluminum housing and external fins

## Ordering Matrix

Family	Watts	Color Temp	Finish	Photocell
ALED	20 = 20W 13 = 13W 10 = 10W	= Cool Y = Warm N = Neutral	= Bronze W = White	= No Photocell /PC = 120V Button /PC2 = 277V Button